

Oil in Water Monitor Floating Oil Spill Alarm

Bulletin SSIN022 Issue/Rev. 0.1 (1/19)

The **INVALCO Floating Oil Spill Alarm** is a unique floating sensor that continuously monitors for the accumulation of oil at the water surface.

The Floating Oil Spill Alarm sensor monitors the surface dielectric and locks in on the capacitance of the water. Oil that separates to the surface changes the capacitance field and activates the relay alarms.

This unit is normally used in sumps or containments where oil is not typically present. An upstream leak or spill that accumulates in the sump will alarm the monitor. The floating design allows the unit to track the changing water level in the sump and immediately alert operators, pumps or valves.

Features


- Stable tri-float design follows level changes
- Adjustable time delay and sensitivity to eliminate nuisance alarms
- Remote electronics via standard twisted pair
- Available with Intrinsic Safety Barrier for Hazardous Locations
- Waterproof PVC and SS wetted parts allow for use in harsh environments
- Unit also alarms on dry sump conditions to shut down pumps
- Capacitance technology responds to all types of oils and separated liquids of similar dielectrics
- Alarms at 6mm separated surface oil

Benefits

The electronic components are mounted safely above the water level. The unique PMC circuit design immediately converts the sensor signal to a frequency pulse for furtherance to the controller.

The Level Ease controller can be used where oil thickness indication or CE declaration is required.

All calibration, control relays and power wiring is available at the main control unit. This can be safely mounted up to 1 km away from the sump.

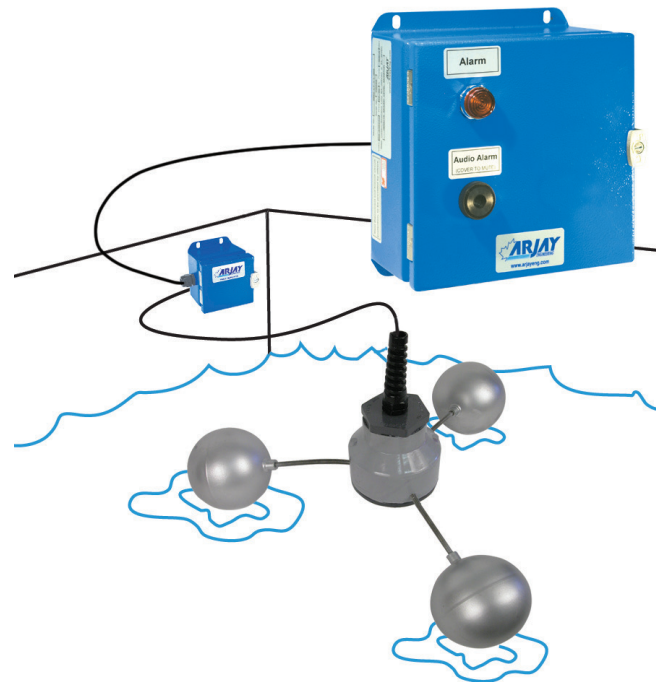

Specifications – Control Unit

Operating Temperature

-4°F to 140°F (-20°C to 60°C)

Power Input

24 vdc or 110 vac or 220 vac

Alarm Relay

5 amp, DPDT, dry

Standards

UL, CSA, Entela

Specifications – Float Sensor

Operating Temperature

32°F to 122°F (0°C to 50°C)

I.S. Approval

CSA Class1, Zone 2, Div 2, Groups A, B, C, D (when ordered with Intrinsic Barrier Option)

The specifications contained herein are subject to change without notice and any user of said specifications should verify from the manufacturer that the specifications are currently in effect. Otherwise, the manufacturer assumes no responsibility for the use of specifications which may have been changed and are no longer in effect.

TechnipFMC.com

© TechnipFMC 2019. All rights reserved. SSIN022 Issue/Rev. 0.1 (1/19)

TechnipFMC
FMC Technologies
Measurement Solutions, Inc.
13460 Lockwood Road
Building S01
Houston, Texas 77044 USA
P:+1 281.591.4000

USA Operation
1602 Wagner Avenue
Erie, Pennsylvania 16510 USA
P:+1 814.898.5000

Germany Operation
Smith Meter GmbH
Regentstrasse 1
25474 Ellerbek, Germany
P:+49 4101.304.0