



Flow Monitor

BP2900 Series

DESCRIPTION

The BP2900 flow monitor incorporates state-of-the-art, digital signal processing technology, designed to provide exceptional flexibility at a very affordable price. Though it is designed for use with Pembina flow sensors, this monitor can be used with almost any flow sensor producing a low amplitude AC output or contact closure signal.

OPERATION

This monitor can accept low-level frequency input signals typically found in turbine flow sensors. The output signal for these types of sensors is a frequency proportional to the rate of flow. The BP2900 monitor uses the frequency information to calculate flow rate and total flow. Through the use of the programming buttons, you can select rate units, total units and unit time intervals among other functions. If required, the monitor can easily be re-configured in the field. Finally, you can choose between simultaneously showing rate and total, or alternating between rate and grand total.

The monitor provides advanced communication capabilities over an RS485 bus using Modbus RTU and control outputs.

The package is a polycarbonate NEMA 4X enclosure.

APPLICATIONS

The BP2900 monitor is suitable for application in a wide variety of metering needs. A few of the more common industries are:

- Secondary oil recovery applications
- Remediation and reclamation
- Fracture/refracture
- Coal bed methane
- Regulatory compliance and environmental accountability
- Industrial chemicals
- Aggressive chemical processing applications
- Semiconductor manufacturing
- Fertilizer production and dispensing
- Pesticide manufacture
- Liquid batching and water cooling



FEATURES

- Robust alarm parameters provide faster warning when something changes in the process or pipeline.
- Greater control and greater visibility of batch operations.
- Advanced connectivity options allow you to connect meters to your network for remote monitoring and process automation capabilities.
- Updated display and totalization options provide more flow information, including simultaneous display of rate and total as well as standard, batch and grand totals.
- Various mounting options provide a BP2900 model for your operation.

PART NUMBER CONSTRUCTION


| | | | | | |
|-------------------------|------------------------------------|----------------------|----------------------|---|----------------------|
| Pembina BP2900 | <input type="text"/> | <input type="text"/> | <input type="text"/> | - | <input type="text"/> |
| Display Model | Pembina BP2900 Display BP29 | | | | |
| Model | Advanced A | | | | |
| Mounting | | | | | |
| Meter | | | | | M |
| Remote | | | | | R |
| Swivel | | | | | S |
| Handheld | | | | | H |
| Units of Measure | Customer Selectable CS | | | | |

SPECIFICATIONS

| | | | | | |
|--|---|--|--|-------------------------|-------------------------|
| Display | Common | Simultaneously shows Rate and Total 5 x 7 Dot Matrix LCD, STN Fluid | | | |
| | 6 Digit Rate, 0.5 inch (12.7 mm) numeric | | | | |
| | 7 Digit Total, 0.5 inch (12.7 mm) numeric | | | | |
| | Engineering Unit Labels 0.34 in. (8.6 mm) | | | | |
| | Annunciators | Alarm 1 (A), Alarm 2 (B), Battery Level (■■■■■), RS485 Communications (COM) | | | |
| Power | Auto switching between internal battery and external loop power; includes isolation between loop power and other I/O | | | | |
| | Battery | 3.6V DC lithium D Cell gives up to 6 years of service life Note: Modbus enabled at baud rate of 19,200 or higher without loop power reduces battery life to 1 year | | | |
| | Loop | 4...20 mA, two wire, 25 mA limit, reverse polarity protected, 7V DC loop loss | | | |
| Inputs | Magnetic Pickup | Frequency Range | 1...3500 Hz | | |
| | | Frequency Measurement Accuracy | ±0.1% | | |
| | | Over Voltage Protection | 28V DC | | |
| | | Trigger Sensitivity | 30 mV _{p-p} (High) or 60 mV _{p-p} (Low) - (selected by circuit board jumper) | | |
| | Amplified Pulse | Direct connection to amplified signal (pre-amp output from sensor) | | | |
| Outputs | Analog 4...20 mA | 4...20 mA, two-wire current loop 25 mA current limit | | | |
| | Totalizing Pulse | One pulse for each Least Significant Digit (LSD) increment of the totalizer | | | |
| | | Pulse Type (selected by circuit board jumper) | Opto-isolated (Iso) open collector transistor | | |
| | | | Non-isolated open drain FET | | |
| | | Maximum Voltage | 28V DC | | |
| | | Maximum Current Capacity | 100 mA | | |
| | | Maximum Output Frequency | 16 Hz | | |
| | Pulse Width | 30 mSec fixed | | | |
| | Status Alarms | Type | Open collector transistor Adjustable flow rate with programmable dead band and phase. | | |
| | | Maximum Voltage | 28V DC | | |
| Maximum Current | | 100 mA | | | |
| Pullup Resistor | | External required: 2.2 k ohm minimum, 10 k ohm maximum | | | |
| Modbus Digital Communications | Modbus RTU over RS485, 127 addressable units / 2-wire plus ground network, selectable baud rate: 9600, 19200, 38400, 57600 or 115200, long integer and single precision IEEE754 formats; retrieve: flow rate, job totalizer, grand totalizer, alarm status and battery level; write: reset job totalizer, reset grand totalizer | | | | |
| Data Configuration and Protection | Two four-digit user selectable passwords; level one password enables job total reset only, level two password enables all configuration and totalizer reset functions | | | | |
| Certifications | Safety | Intrinsically Safe Class I Division 1, Groups C, D; Class II, Division 1 Groups E, F, G | | | |
| | Entity Parameters | 4...20 mA Loop: Vmax = 28V DC | I _{max} = 26 mA | C _i = 0.5 µF | L _i = 0 mH |
| | | Pulse Output: Vmax = 28V DC | I _{max} = 100 mA | C _i = 0 µF | L _i = 0 mH |
| | | Reset Input: Vmax = 5V DC | I _{max} = 5 mA | C _i = 0 µF | L _i = 0 mH |
| | | RS485: Vmax = 10V DC | I _{max} = 60 mA | C _i = 0 µF | L _i = 0 mH |
| | | Turbine Input: Voc = 2.5V | I _{sc} = 1.8 mA | C _a = 1.5 µF | L _a = 1.65 H |
| EMC | IEC61326-1; 2004/108/EC | | | | |
| Measurement Accuracy | Common Accuracy | 0.05% | | | |
| Response Time (Damping) | Common Response Time | 1...100 seconds response to a step change input, user adjustable | | | |
| Environmental Limits | Common Limits | -22...158° F (-30...70° C); 0...90% humidity, non-condensing; | | | |
| Materials and Enclosure Ratings | Polycarbonate, stainless steel, polyurethane, thermoplastic elastomer, acrylic; NEMA 4X/IP 66 meter, remote and swivel mount; NEMA/UL/CSA Type 4X (IP-66) | | | | |
| Engineering Units | Liquid | US Gallons, Liters, Oil Barrels (42 gallon), Liquid Barrels (31.5 gallon), Cubic Meters, Million Gallons, Cubic Feet, Million Liters, Acre Feet | | | |
| | Gas | Cubic Feet, Thousand Cubic Feet, Million Cubic Feet, Standard Cubic Feet, Actual Cubic Feet, Normal Cubic Meters, Actual Cubic Meters, Liters | | | |
| | Rate Time | Seconds, minutes, hours, days | | | |
| | Totalizer Exponents | 0.00, 0.0, X1, x10, x100, x1000 | | | |
| | K-factor Units | Pulses/US Gallon, Pulse/cubic meter, pulses/liter, pulses/cubic foot | | | |


MOUNTING OPTIONS AND DIMENSIONS

Meter Mount

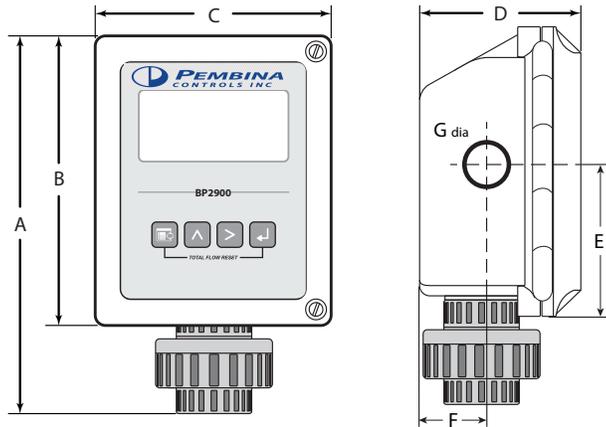


| A in. (mm) | B in. (mm) | C in. (mm) | D in. (mm) | E in. (mm) | F in. (mm) | G dia in. (mm) |
|--------------|--------------|--------------|--------------|-------------|-------------|----------------|
| 9.25 (235.0) | 7.00 (177.8) | 5.75 (146.0) | 4.00 (101.6) | 3.45 (87.6) | 1.50 (38.1) | 0.875 (22.2) |

Remote Mount

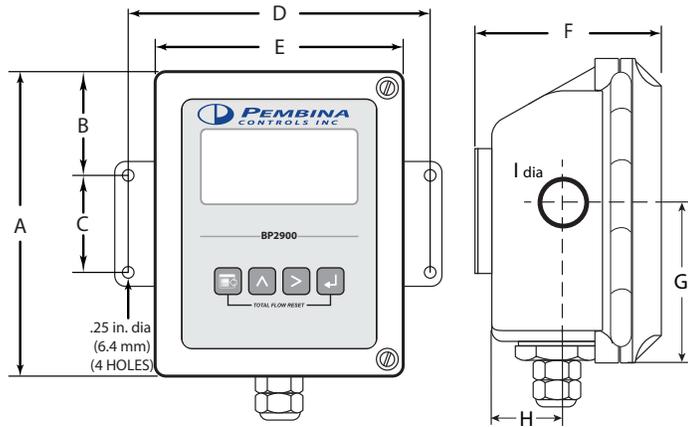


| A in. (mm) | B in. (mm) | C in. (mm) | D in. (mm) | E in. (mm) | F in. (mm) | G in. (mm) | H in. (mm) | I dia in. (mm) |
|--------------|-------------|-------------|--------------|--------------|--------------|-------------|-------------|----------------|
| 7.00 (177.8) | 2.40 (61.0) | 2.25 (57.2) | 7.00 (177.8) | 5.75 (146.0) | 4.38 (111.2) | 3.45 (87.6) | 1.50 (38.1) | 0.875 (22.2) |

Handheld

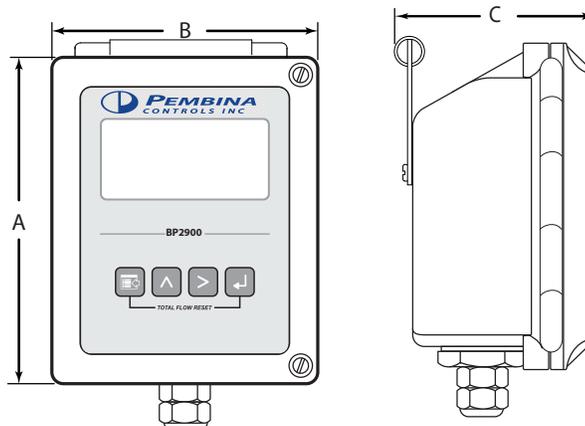

| A in. (mm) | B in. (mm) | C in. (mm) |
|--------------|--------------|--------------|
| 7.00 (177.8) | 5.75 (146.0) | 4.38 (111.2) |

Swivel Mount

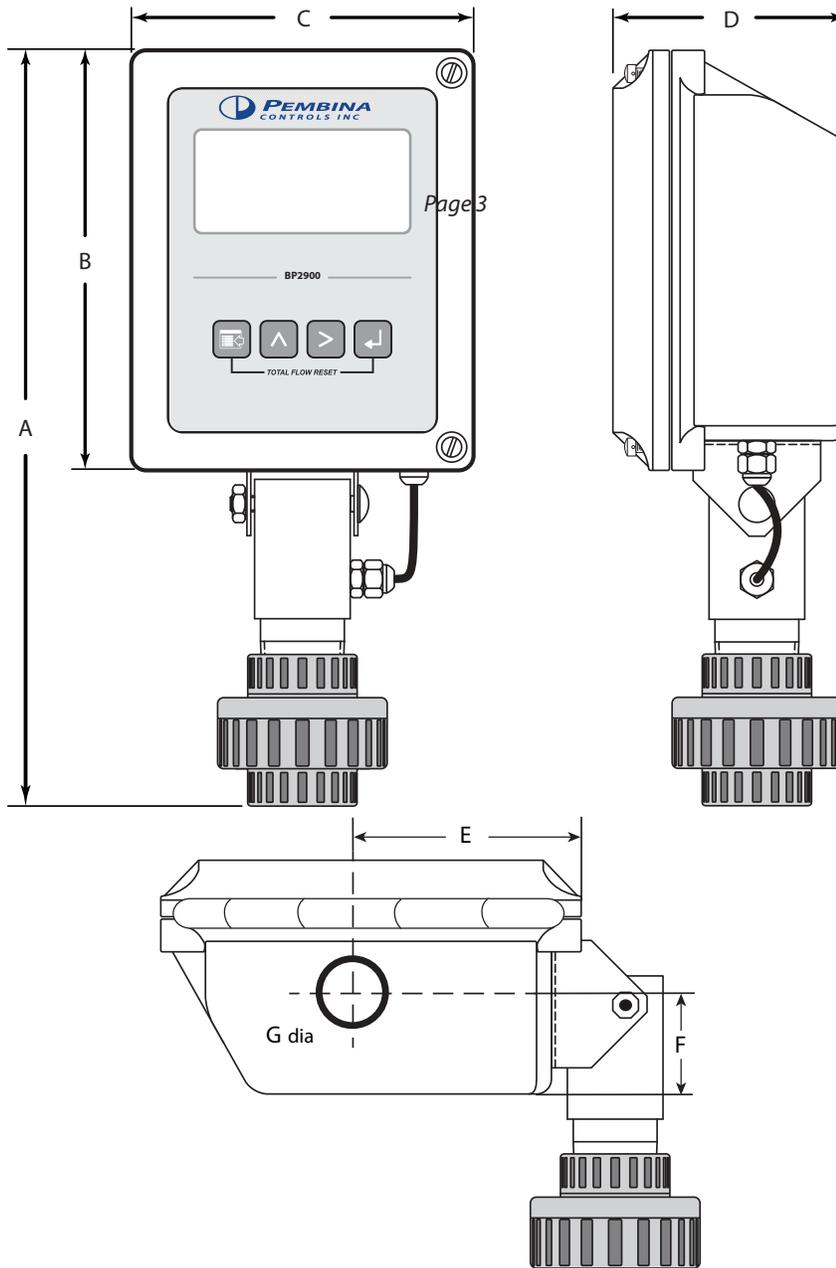

| A in. (mm) | B in. (mm) | C in. (mm) | D in. (mm) | E in. (mm) | F in. (mm) | G dia in. (mm) |
|---------------|--------------|--------------|--------------|-------------|-------------|----------------|
| 12.25 (311.2) | 7.00 (177.8) | 5.75 (146.0) | 4.00 (101.6) | 3.45 (87.6) | 1.50 (38.1) | 0.875 (22.2) |

The Pembina BP2900 is proprietary to Pembina Controls Inc. and a private labeled Blancett product. Blancett is a registered trademark of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2020 Badger Meter, Inc. All rights reserved.

Head Office and Distribution Center:

9511 – 28th Avenue NW | Edmonton, Alberta | T6N 0A3

Phone: 780.432.6821 | Fax: 780.432.6867 | Email: sales@pem-controls.com

Toll Free (USA & Canada): 1.877.736.2462 | International: +01 780.432.6821

All Corporate names and trademarks appearing in this document are the property of their respective entities.

© All rights reserved. 2021 Pembina Controls Inc
