


# Temperature Measurement Solutions



Dial Indicating  
Electronic  
Industrial RTDs  
Thermowells  
Accessories

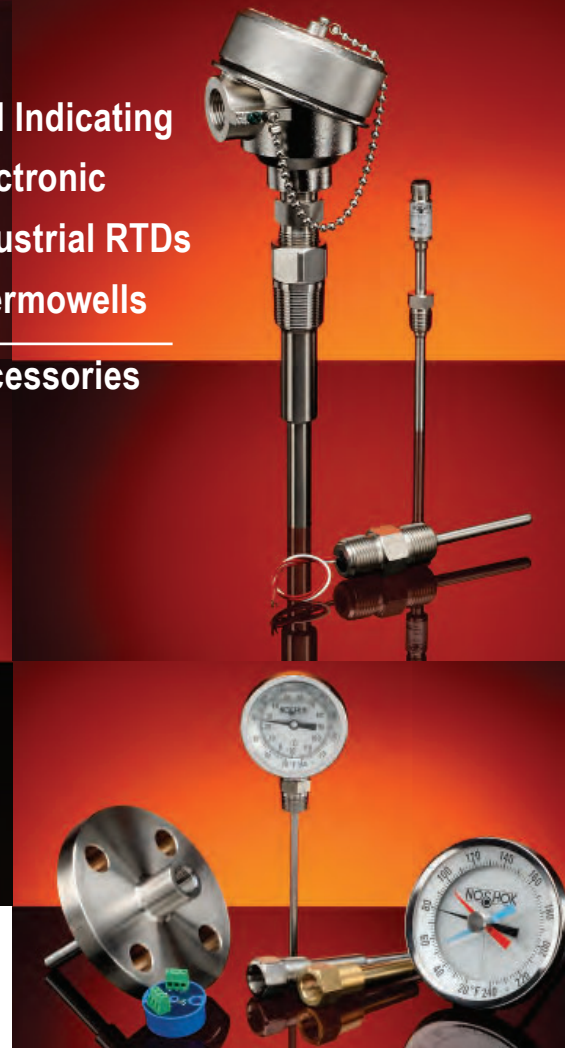

**A**t NOSHOK, we pride ourselves on being innovators in the industry by continually offering the latest technology and measurement solutions, and providing the best customer support in the marketplace.

Established in 1967, NOSHOK was one of the first companies to offer liquid filled pressure gauges. We also took a bold step by backing our quality gauges with an extended 3-year warranty. That unwavering standard of quality has endured for over 50 years, and as we have expanded our product offering we continue to provide industry-leading warranties. NOSHOK also leads the industry as one of the first companies to offer corrosion-resistant zinc nickel plating standard on our carbon steel valves.

We have the capacity to put together special requirements which are so often hard to find. If you do not find what you need in this catalog, chances are we can still put a solution together.

NOSHOK is committed to providing excellence on every level. Thank you for choosing NOSHOK products.



Jeff N. Scott  
President



**NOSHOK Corporate Headquarters**  
Your Single Source Instrumentation Company

**NOSHOK is a member and actively supports:**



**NOSHOK is an ISO 9001:2015 registered company.**

## WARRANTY INFORMATION

NOSHOK's **Eight Year Warranty** applies to our 3" and 5" 300 Series Bimetal Thermometers. Our **Three Year Warranty** applies to our 800 Series Platinum Resistance Temperature Transmitters, 810 Series Compact OEM Temperature Transmitters, 820/821 and 822/823 Series Digital Temperature Indicators, 850 Series Electronic Indicating Temperature Switch/Transmitters, 900/915 Series Probe-Type Industrial RTDs, 910 Series Probe-Type Industrial RTDs with Process Connection and 920 Series RTD Transmitter. Our **One Year Warranty** applies to our 100, 150, 300 (2") and 350 Series Bimetal Thermometers, Vapor Actuated Remote Thermometers and Thermowells.

**NOSHOK guarantees all products** to be free from defects in material and workmanship, to remain within catalogued accuracy specifications, and to operate within the catalogued performance specifications. These products must be operated within the catalogued environmental and application parameters. Determination of failure will be made by NOSHOK, Inc.'s equipment and personnel or a certified test facility specializing in this type of evaluation.

## T A B L E O F C O N T E N T S



### DIAL INDICATING THERMOMETERS

<b>Bimetal, Industrial Type:</b>	
100 SERIES .....	4-7
<b>Bimetal, Testing and General Purpose:</b>	
150 SERIES .....	8-11
<b>Bimetal, Industrial Type with External Reset, Sanitary Options:</b>	
300 SERIES .....	12-17
<b>Bimetal, Testing and General Purpose with External Reset:</b>	
350 SERIES .....	18-21
<b>Vapor Actuated Remote:</b>	
300/400/600/700 SERIES .....	22-29

### DIAL INDICATING THERMOMETER OPTIONS

Maximum Indicating Pointer, Silicone Filled, Stem Types, Connections, Special Dials, Lenses, Certified Calibration .....	30-31
--	-------

### ELECTRONIC TEMPERATURE MEASUREMENT

<b>Platinum Resistance Temperature Transmitter:</b>	
800 SERIES .....	32-33
<b>Compact OEM Temperature Transmitter:</b>	
810 SERIES .....	34-35
<b>Digital Temperature Indicator:</b>	
820/821 SERIES .....	36-37
<b>Digital Temperature Indicator, Battery Powered</b>	
822/823 SERIES .....	38-39
<b>Electronic Indicating Temperature Transmitter/Switch:</b>	
850 SERIES .....	40-41

### INDUSTRIAL RESISTANCE TEMPERATURE DEVICES (RTD)

<b>Industrial RTD, Probe Type:</b>	
900 SERIES .....	42-43
<b>Industrial RTD, Probe Type with Connection Head:</b>	
910/915 SERIES .....	44-45
<b>RTD Transmitter:</b>	
920 SERIES .....	46

### RTD ACCESSORIES

Connection Heads, Terminal Blocks .....	47
---	----

### THERMOWELLS

<b>Thermowells:</b>	
50/75/100 SERIES .....	48-50
<b>Reference Information</b> .....	51-55

In keeping with and for purpose of product and/or manufacturing process improvements, NOSHOK, Inc. reserves the right to make design changes without prior notice.



# Bimetal, Industrial Type



## 100 SERIES

- Heavy-duty, industrial thermometer featuring a weather-resistant, tamper-proof case
- Single °F, single °C, and dual scale options available
- Accuracy: ±1% full scale, Grade A, ASME B40.3
- 1-3/4", 2", 3" and 5" sizes - center back connection only
- 304 Stainless Steel case and bezel
- Standard stem lengths 2-1/2" through 42"
- Highly sensitive bimetallic helix coil is heat-treated for stress relief, and silicone-coated to minimize pointer vibration and maximize heat transfer and response time
- 360° groove around stem is a visual reference to show minimum immersion point
- Made in the U.S.A.

### APPLICATIONS

Used in almost every area of manufacturing, especially suited for applications in the following areas:

- Industrial process
- Petrochemical
- Food & beverage processing
- Commercial
- Wastewater

	SERIES	SPECIFICATIONS
<b>Case &amp; bezel</b>	All 100 Series	304 Stainless Steel; 316 Stainless Steel optional
<b>Lens</b>	All 100 Series	Instrument glass
<b>Pointer</b>	All 100 Series	Aluminum, black finish
<b>Stem diameter</b>	18-110 20-110, 30-110, 50-110	.150" (3.81 mm) .250" (6.35 mm)
<b>Accuracy</b>	All 100 Series	±1% full scale, Grade A, ASME B40.3
<b>Dial</b>	All 100 Series	Anodized Aluminum with large black numbers and graduations
<b>Process connection</b>	18-110 20-110 30-110, 50-110	1/4" NPT, 1/8" and 3/8" NPT optional 1/4" NPT 1/2" NPT
<b>Wetted parts</b>	All 100 Series	304 Stainless Steel; 316 Stainless Steel optional
<b>Hermetic seal</b>	All 100 Series	Per ASME B40.3 dustproof and leakproof
<b>Bimetal coil</b>	All 100 Series	Silicone coated helix coil on ranges below 500 °F for vibration dampening, maximum heat transfer and response time
<b>Over temperature limits</b>	All 100 Series	Up to 250 °F 100%; 250 °F to 550 °F 50%; 550 °F to 1,000 °F continuous use up to 800 °F; intermittent use over 800 °F



**WARNING:** This product can expose you to chemicals including Chromium (VI) and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Thermowells are recommended for pressure, corrosive fluids and high velocity applications, see pages 48-50.


ORDERING INFORMATION					
<b>DIAL SIZES</b>	18	1-3/4" ††	30	3"	
	20	2"	50	5"	
<b>CASE TYPES</b>	110	Back connection			
<b>STEM LENGTHS</b> Available up to 120"	025	2-1/2"	090	9"	240 24"
	040	4"	120	12"	300 30"
	060	6"	150	15"	360 36"
	080	8" †	180	18"	420 42"
<b>TEMPERATURE RANGES</b> <i>Dual Scale °F/°C</i>	-100/100 F/C	-100 °F/°C to 100 °F/°C	0/250 F/C	0 °F/°C to 250 °F/°C	50/500 F/C 50 °F/°C to 500 °F/°C
	-40/160 F/C	-40 °F/°C to 160 °F/°C	20/240 F/C	20 °F/°C to 240 °F/°C	150/750 F/C 150 °F/°C to 750 °F/°C
	0/140 F/C	0 °F/°C to 140 °F/°C	25/125 F/C	25 °F/°C to 125 °F/°C	200/1000 F/C 200 °F/°C to 1,000 °F/°C*
	0/180 F/C	0 °F/°C to 180 °F/°C	50/300 F/C	50 °F/°C to 300 °F/°C	
	0/220 F/C	0 °F/°C to 220 °F/°C	50/400 F/C	50 °F/°C to 400 °F/°C	
<i>Single Scale °F</i>	-100/100 F	-100 °F to 100 °F	0/300 F	0 °F to 300 °F**	50/550 F 50 °F to 550 °F
	-50/120 F	-50 °F to 120 °F	0/500 F	0 °F to 500 °F**	100/800 F 100 °F to 800 °F**
	-40/160 F	-40 °F to 160 °F	20/240 F	20 °F to 240 °F	150/750 F 150 °F to 750 °F
	0/140 F	0 °F to 140 °F	25/125 F	25 °F to 125 °F	200/1000 F 200 °F to 1,000 °F*
	0/180 F	0 °F to 180 °F	50/250 F	50 °F to 250 °F	
	0/200 F	0 °F to 200 °F	50/300 F	50 °F to 300 °F	
	0/220 F	0 °F to 220 °F	50/400 F	50 °F to 400 °F	
	0/250 F	0 °F to 250 °F	50/500 F	50 °F to 500 °F	
<i>Single Scale °C</i>	-75/175 C	-75 °C to 175 °C	0/50 C	0 °C to 50 °C	0/300 C 0 °C to 300 °C
	-70/70 C	-70 °C to 70 °C**	0/60 C	0 °C to 60 °C**	0/400 C 0 °C to 400 °C
	-50/100 C	-50 °C to 100 °C**	0/80 C	0 °C to 80 °C**	0/450 C 0 °C to 450 °C
	-50/50 C	-50 °C to 50 °C	0/100 C	0 °C to 100 °C	100/400 C 100 °C to 400 °C
	-40/70 C	-40 °C to 70 °C	0/150 C	0 °C to 150 °C	100/550 C 100 °C to 550 °C*
	-20/120 C	-20 °C to 120 °C**	0/200 C	0 °C to 200 °C	
	-10/110 C	-10 °C to 110 °C**	0/250 C	0 °C to 250 °C	
Consult factory for additional temperature ranges					
<b>OPTIONS</b>	1/8	1/8" NPT †	AU	1/2" NPT Adjustable Union **	SL Silicone Filled ***
	3/8	3/8" NPT †	HD	Heavy-Duty Stem (0.375" Dia.) **	ST Stainless Steel Tagging
	6	6 mm stem diameter **	LL	Polycarbonate Lens	TG Tempered Glass Lens †††
	8	8 mm stem diameter **	PL	Acrylic Lens	
	316	316 SS Wetted Parts **	SG	Safety Glass Lens **	

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

**Note:** All 316 Stainless Steel construction (case, bezel, wetted parts) is available. Please consult factory.


- \* Thermometers with temperature ranges 200/1,000 °F and 100/500 °C are not recommended for continuous use above 800 °F/425 °C. **For intermittent use only.**
- \*\* Available for 30-110 and 50-110 models only.
- \*\*\* Available for 20-110, 30-110 and 50-110 models only. Available only for ranges from -50 °F (-45 °C) to 500 °F (260 °C). Polycarbonate lens is standard with Silicone Fill.
- † Available for 18-110 model only.
- †† 18-110 model is only available in 2-1/2", 4", 6", 8", 12", 15" and 18" stem lengths.
- ††† Not available with Silicone Filled (SL) option.

**EXAMPLE**

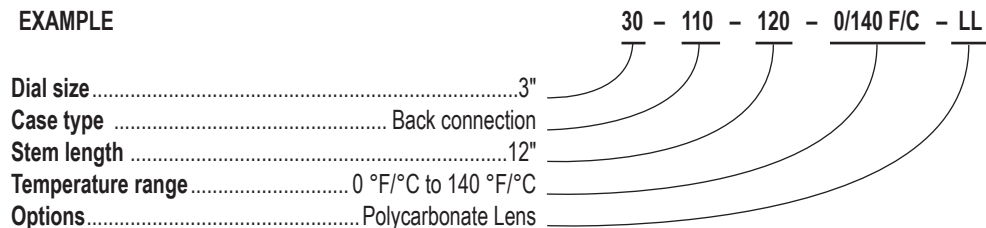


# Dimensions


18-110

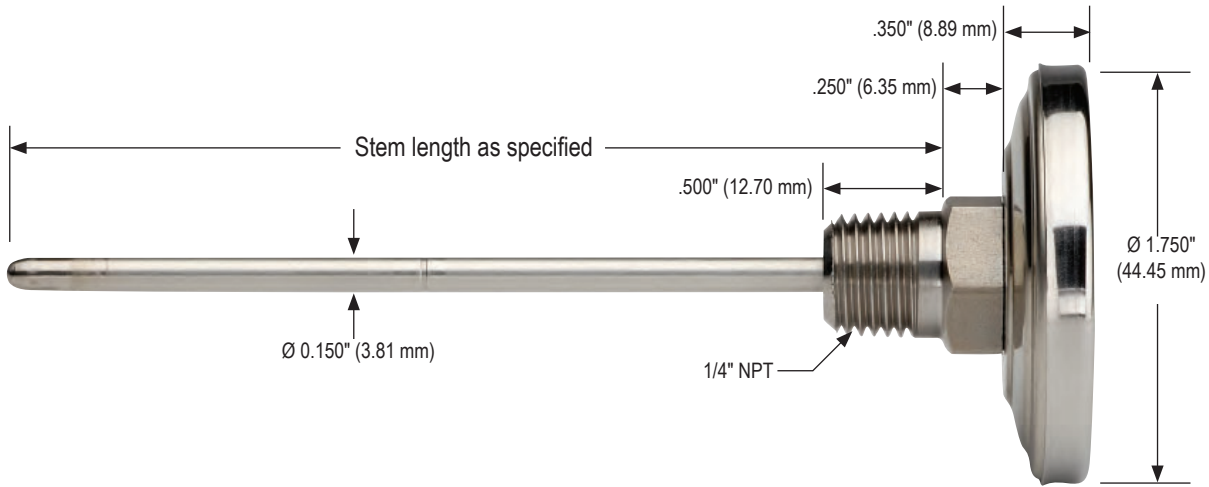


20-110

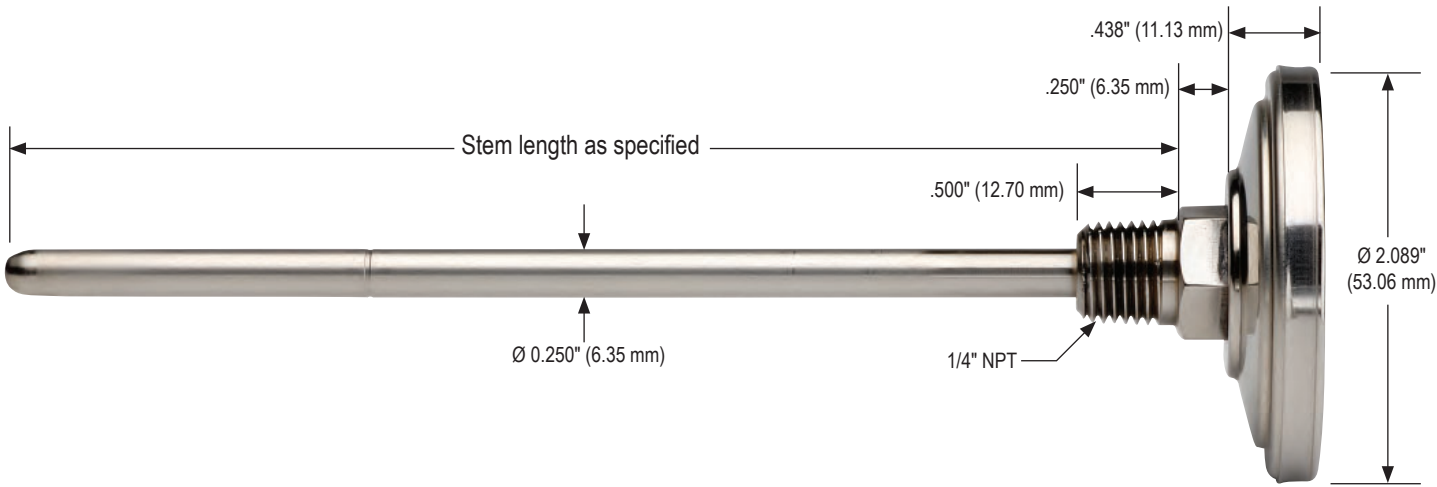

**30-110**

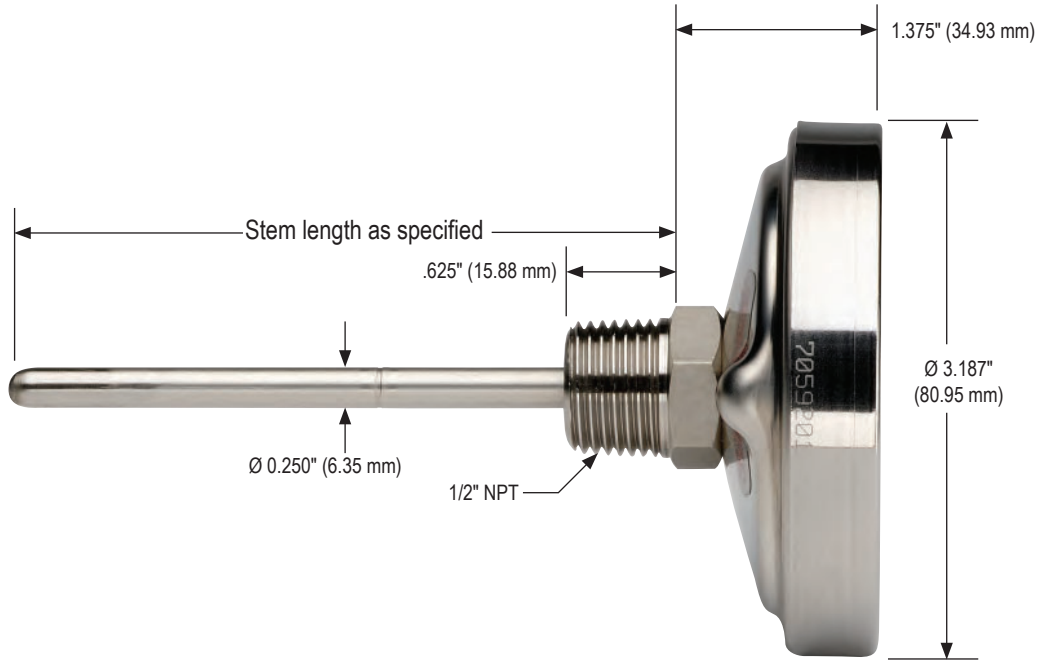

**50-110**

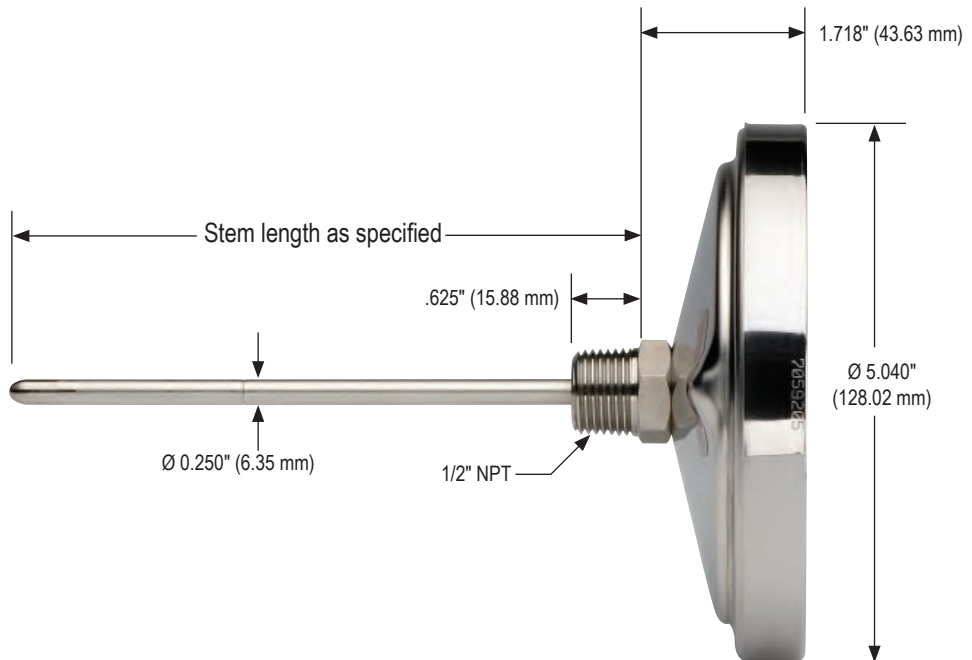

# Bimetal, Testing and General Purpose

## 150 SERIES



- Designed for general purpose testing applications, featuring a weather-resistant, tamper-proof case
- Pocket sized model is used by inspectors, service and maintenance personnel for spot checking
- Single °F, single °C, and dual scale options (1-3/4" and 2" models only) available
- Accuracy: ±1% full scale, Grade A, ASME B40.3
- 1", 1-3/4" and 2" sizes - center back connection only
- 304 Stainless Steel case and bezel
- Highly sensitive bimetallic helix coil is heat-treated for stress relief, and silicone-coated to minimize pointer vibration and maximize heat transfer and response time
- 360° groove around stem is a visual reference to show minimum immersion point
- Made in the U.S.A.

### APPLICATIONS

Used in almost every area of manufacturing, especially suited for laboratory testing and general purpose applications in the following areas:

- Laboratory
- Food & beverage processing
- Concrete
- Asphalt
- OEM equipment

	SERIES	SPECIFICATIONS
<b>Case &amp; bezel</b>	All 150 Series	304 Stainless Steel
<b>Lens</b>	All 150 Series	Instrument glass
<b>Pointer</b>	All 150 Series	Aluminum, black finish
<b>Stem diameter</b>	All 150 Series	.150" (3.81 mm)
<b>Accuracy</b>	All 150 Series	±1% full scale, Grade A, ASME B40.3
<b>Dial</b>	All 150 Series	Anodized Aluminum with large black numbers and graduations
<b>Wetted parts</b>	All 150 Series	304 Stainless Steel
<b>Hermetic seal</b>	All 150 Series	Per ASME B40.3 dustproof and leakproof
<b>Bimetal coil</b>	All 150 Series	Silicone coated helix coil on ranges below 500 °F for vibration dampening, maximum heat transfer and response time
<b>Over temperature limits</b>	All 150 Series	Up to 250 °F 100%; 250 °F to 550 °F 50%; 550 °F to 1,000 °F continuous use up to 800 °F; intermittent use over 800 °F



**WARNING:** This product can expose you to chemicals including Chromium (VI) and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Thermowells are recommended for pressure, corrosive fluids and high velocity applications, see pages 48-50.




ORDERING INFORMATION					
<b>DIAL SIZES</b>	<b>10</b>	1" **	<b>18</b>	1-3/4"	<b>20</b> 2"
<b>CASE TYPES</b>	150 Back connection				
<b>STEM LENGTHS</b>	<b>050</b>	5"	<b>120</b>	12" †	
	<b>080</b>	8"	<b>180</b>	18" †	
<b>TEMPERATURE RANGES</b>	<b>-100/100 F/C</b>	-100 °F/°C to 100 °F/°C	<b>0/250 F/C</b>	0 °F/°C to 250 °F/°C	
	<b>-40/160 F/C</b>	-40 °F/°C to 160 °F/°C	<b>20/240 F/C</b>	20 °F/°C to 240 °F/°C	
<i>Dual Scale °F/°C</i>	<b>0/140 F/C</b>	0 °F/°C to 140 °F/°C	<b>25/125 F/C</b>	25 °F/°C to 125 °F/°C	
<i>(Not available on 1" model)</i>	<b>0/180 F/C</b>	0 °F/°C to 180 °F/°C	<b>50/300 F/C</b>	50 °F/°C to 300 °F/°C	
	<b>0/220 F/C</b>	0 °F/°C to 220 °F/°C	<b>50/400 F/C</b>	50 °F/°C to 400 °F/°C	
<i>Single Scale °F</i>	<b>-100/100 F</b>	-100 °F to 100 °F	<b>0/220 F</b>	0 °F to 220 °F **	
	<b>-50/120 F</b>	-50 °F to 120 °F	<b>0/250 F</b>	0 °F to 250 °F	
	<b>-40/160 F</b>	-40 °F to 160 °F **	<b>20/240 F</b>	20 °F to 240 °F	
	<b>0/140 F</b>	0 °F to 140 °F	<b>25/125 F</b>	25 °F to 125 °F **	
	<b>0/180 F</b>	0 °F to 180 °F	<b>50/250 F</b>	50 °F to 250 °F	
	<b>0/200 F</b>	0 °F to 200 °F	<b>50/300 F</b>	50 °F to 300 °F	
<i>Single Scale °C</i>	<b>-75/175 C</b>	-75 °C to 175 °C	<b>-10/110 C</b>	-10 °C to 110 °C **	
	<b>-50/100 C</b>	-50 °C to 100 °C	<b>0/50 C</b>	0 °C to 50 °C **	
	<b>-50/25 C</b>	-50 °C to 25 °C	<b>0/100 C</b>	0 °C to 100 °C	
	<b>-50/50 C</b>	-50 °C to 50 °C	<b>0/150 C</b>	0 °C to 150 °C	
	<b>-40/70 C</b>	-40 °C to 70 °C **	<b>0/200 C</b>	0 °C to 200 °C	
	<b>-20/120 C</b>	-20 °C to 120 °C	<b>0/250 C</b>	0 °C to 250 °C **	
	Consult factory for additional temperature ranges				
<b>OPTIONS</b>	<b>LL</b>	Polycarbonate Lens	<b>PS</b>	Pocket Sheath ***	
	<b>PL</b>	Acrylic Lens †	<b>SL</b>	Silicone Filled †	
			<b>ST</b>	Stainless Steel Tagging	
			<b>TG</b>	Tempered Glass Lens ††	

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.


- \* Thermometers with temperature ranges 200/1000 °F and 100/500 °C are not recommended for continuous use above 800 °F/425 °C. **For intermittent use only.**
- \*\* 1" model available **only** in these ranges.
- \*\*\* Available for 10-150 and 18-150 models only, with stem lengths of 5" or 8".
- † Available for 20-150 models only. Available only for ranges from -50 °F (-45 °C) to 500 °F (260 °C). Polycarbonate lens is standard with Silicone Fill.
- †† Not available on 10-150 model. Also not available with Silicone Filled (SL) option.

**EXAMPLE**

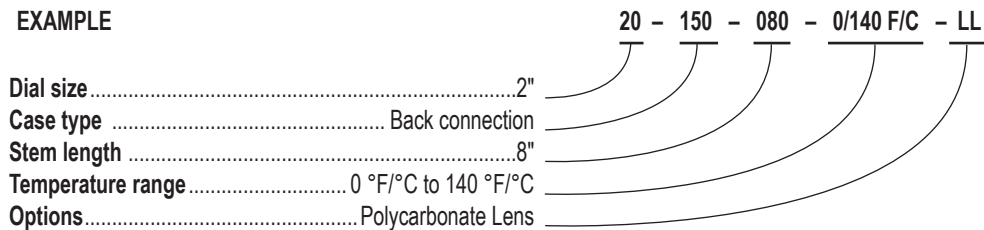


# Dimensions


10-150

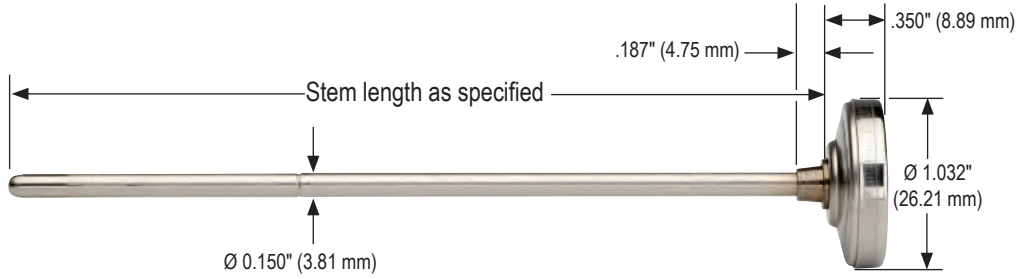

18-150

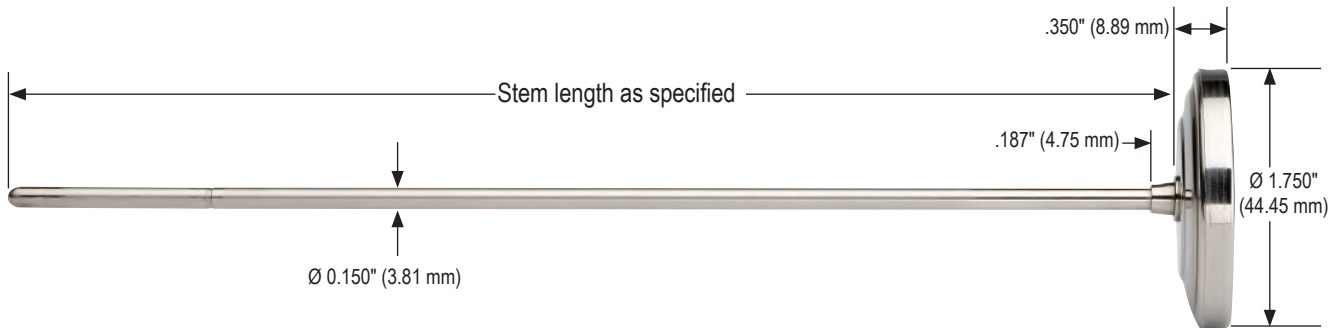

**20-150**

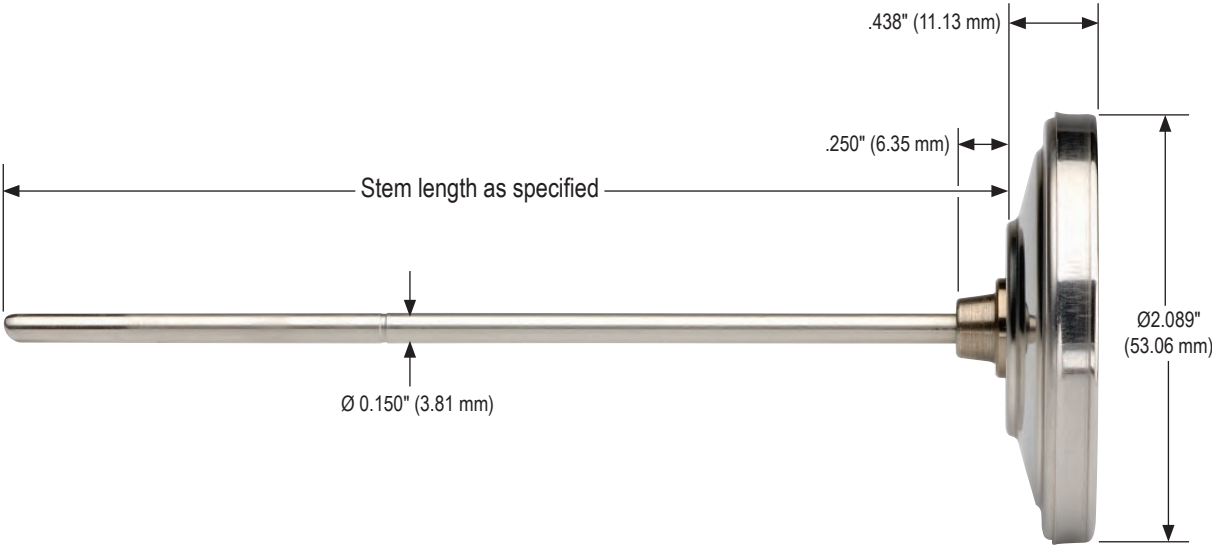

# Bimetal, Industrial Type with External Reset, Sanitary Options



## 300 SERIES



- Highest quality thermometers available on the market
- Easy to calibrate with 1/16" Allen key
- Corrosion-resistant 304 Stainless Steel case and bezel provide a hermetic seal to prevent lens fogging and moisture damage
- Sanitary Tri-Clamp® options available
- Single °F, single °C, and dual scale options available
- Accuracy: ±1% full scale, Grade A, ASME B40.3
- 2", 3" and 5" sizes - center back and bottom connections
- 2" Dial Size - 1/4" NPT; 3" & 5" Dial Sizes - 1/2" NPT
- Standard stem lengths 2-1/2" through 42"
- Minimum or maximum indicating pointers are available in 3" and 5" sizes
- Highly sensitive bimetallic helix coil is heat-treated for stress relief, and silicone-coated to minimize pointer vibration and maximize heat transfer and response time
- 360° groove around stem is a visual reference to show minimum immersion point
- Made in the U.S.A.

### APPLICATIONS

- Industrial process
- Petrochemical
- Food & beverage processing
- Commercial
- Wastewater



Sanitary options available

	SERIES	SPECIFICATIONS
Case & bezel	All 300 Series	304 Stainless Steel
Lens	All 300 Series	Instrument glass
Pointer	All 300 Series	Aluminum, black finish
Stem diameter	300 Series, Standard & 06SAN 300 Series, All Other Sanitary models	.250" (6.35 mm) .375" (9.53 mm)
Accuracy	All 300 Series	±1% full scale, Grade A, ASME B40.3
Dial	All 300 Series	Anodized Aluminum with large black numbers and graduations
Process connection	300 Series, 2" Dial Size, Standard 300 Series, 3" & 5" Dial Size, Standard 300 Series, Sanitary	1/4" NPT 1/2" NPT 3/4" Tri-Clamp through 4" Tri-Clamp
Wetted parts	300 Series, Standard 300 Series, Sanitary	304 Stainless Steel; 316 Stainless Steel optional 316 Stainless Steel
Hermetic seal	All 300 Series	Per ASME B40.3 dustproof and leakproof
Bimetal coil	All 300 Series	Silicone coated helix coil on ranges below 500 °F for vibration dampening, maximum heat transfer and response time
Over temperature limits	All 300 Series	Up to 250 °F 100%; 250 °F to 550 °F 50%; 550 °F to 1,000 °F continuous use up to 800 °F; intermittent use over 800 °F
Recalibrator	All 300 Series	External reset
Adjustable angle form	320 Series	All Stainless Steel brackets with screws that loosen to allow 360° rotation of head and 180° adjustment of stem position



WARNING: This product can expose you to chemicals including Chromium (VI) and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Thermowells are recommended for pressure, corrosive fluids and high velocity applications, see pages 48-50.

ORDERING INFORMATION						
DIAL SIZES	20 2" (Back connected only)		30 3"		50 5"	
<b>CASE TYPES</b>	300 Bottom connection		310 Back connection		320 Adjustable angle connection **	
<b>STEM LENGTHS</b>	025 2-1/2"		120 12"		300 30"	
	040 4"		150 15"		360 36"	
	060 6"		180 18"		420 42"	
	090 9"		240 24"		Available up to 120"	
<b>TEMPERATURE RANGES</b>	-100/100 F/C -100 °F/°C to 100 °F/°C		0/250 F/C 0 °F/°C to 250 °F/°C		50/500 F/C 50 °F/°C to 500 °F/°C	
<i>Dual Scale °F/°C</i>	-40/160 F/C -40 °F/°C to 160 °F/°C		20/240 F/C 20 °F/°C to 240 °F/°C		150/750 F/C 150 °F/°C to 750 °F/°C	
	0/140 F/C 0 °F/°C to 140 °F/°C		25/125 F/C 25 °F/°C to 125 °F/°C †		200/1000 F/C 200 °F/°C to 1,000 °F/°C *	
	0/180 F/C 0 °F/°C to 180 °F/°C		50/300 F/C 50 °F/°C to 300 °F/°C			
	0/220 F/C 0 °F/°C to 220 °F/°C		50/400 F/C 50 °F/°C to 400 °F/°C			
<i>Single Scale °F</i>	-100/100 F -100 °F to 100 °F		0/250 F 0 °F to 250 °F		50/400 F 50 °F to 400 °F	
	-50/120 F -50 °F to 120 °F		0/300 F 0 °F to 300 °F**		50/500 F 50 °F to 500 °F	
	-40/160 F -40 °F to 160 °F		0/500 F 0 °F to 500 °F**		50/550 F 50 °F to 550 °F	
	0/140 F 0 °F to 140 °F		20/240 F 20 °F to 240 °F		100/800 F 100 °F to 800 °F**	
	0/180 F 0 °F to 180 °F		25/125 F 25 °F to 125 °F		150/750 F 150 °F to 750 °F	
	0/200 F 0 °F to 200 °F		50/250 F 50 °F to 250 °F		200/1000 F 200 °F to 1,000 °F*	
	0/220 F 0 °F to 220 °F		50/300 F 50 °F to 300 °F			
<i>Single Scale °C</i>	-75/175 C -75 °C to 175 °C		0/50 C 0 °C to 50 °C		0/300 C 0 °C to 300 °C	
	-70/70 C -70 °C to 70 °C **		0/60 C 0 °C to 60 °C **		0/400 C 0 °C to 400 °C	
	-50/100 C -50 °C to 100 °C **		0/80 C 0 °C to 80 °C **		0/450 C 0 °C to 450 °C	
	-50/50 C -50 °C to 50 °C		0/100 C 0 °C to 100 °C		100/400 C 100 °C to 400 °C	
	-40/70 C -40 °C to 70 °C		0/150 C 0 °C to 150 °C		100/550 C 100 °C to 550 °C *	
	-20/120 C -20 °C to 120 °C **		0/200 C 0 °C to 200 °C		(Consult factory for additional temperature ranges)	
	-10/110 C -10 °C to 110 °C **		0/250 C 0 °C to 250 °C			
<b>OPTIONS</b>	6 6 mm stem diameter **		HD Heavy-Duty Stem (0.375" Dia.) **		SG Safety Glass Lens **	
	8 8 mm stem diameter **		LL Polycarbonate Lens		SL Silicone Filled †††	
	316 316 SS Connection & Stem **		MIP Min or Max Indicating Pointer***		ST Stainless Steel Tagging	
	AU 1/2" NPT Adjustable Union**		MIP2 Min and Max Indicating Pointers***		TG Tempered Glass Lens ††	
	GD Glow Dial †		PL Acrylic Lens			

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

**Note:** All 316 Stainless Steel construction (case, bezel, wetted parts) is available. Please consult factory.

\* Thermometers with temperature ranges 200/1000 °F and 100/500 °C are not recommended for continuous use above 800 °F/425 °C.

**For intermittent use only.**

\*\* Available for 3" and 5" dial sizes only.

\*\*\* Available only on 30-310 and 50-310 models.

† Available only on 50-310 and 50-320 model. Includes reflective pointer and two reflective clips.


†† Not available with Silicone Filled (SL) option.

††† Available only for ranges from -50 °F (-45 °C) to 500 °F (260 °C). Polycarbonate lens is standard with Silicone Fill.

ORDERING INFORMATION - SANITARY TRI-CLAMP					
DIAL SIZES	30 3"		50 5"		
<b>CASE TYPES</b>	300 Bottom connection		310 Back connection		320 Adjustable angle connection
<b>STEM LENGTHS</b>	01625 1.625"		045 4.5"		135 13.5"
	025 2.5"		075 7.5"		165 16.5"
	0275 2.75"		105 10.5"		225 22.5"
<b>TEMPERATURE RANGES</b>	0/220 F/C 0 °F/°C to 220 °F/°C		20/240 F/C 20 °F/°C to 240 °F/°C		
<i>Dual Scale °F/°C</i>	0/250 F/C 0 °F/°C to 250 °F/°C		50/300 F/C 50 °F/°C to 300 °F/°C		
<i>Single Scale °F</i>	-40/160 F -40 °F to 160 °F		0/250 F 0 °F to 250 °F		50/300 F 50 °F to 300 °F
	0/140 F 0 °F to 140 °F		0/300 F 0 °F to 300 °F		
	0/220 F 0 °F to 220 °F		20/240 F 20 °F to 240 °F		
<i>Single Scale °C</i>	-20/120 C -20 °C to 120 °C		0/100 C 0 °C to 100 °C		
	-10/110 C -10 °C to 110 °C		0/150 C 0 °C to 150 °C		
<b>PROCESS CONNECTIONS</b>	06SAN 3/4" Sanitary Tri-Clamp®		16SAN 2" Sanitary Tri-Clamp®		24SAN 3" Sanitary Tri-Clamp®
	12SAN 1-1/2" Sanitary Tri-Clamp®		20SAN 2-1/2" Sanitary Tri-Clamp®		32SAN 4" Sanitary Tri-Clamp®

**Note:** Most standard bimetal thermometer options are available with Sanitary Tri-Clamp connection, consult factory.


**EXAMPLE**

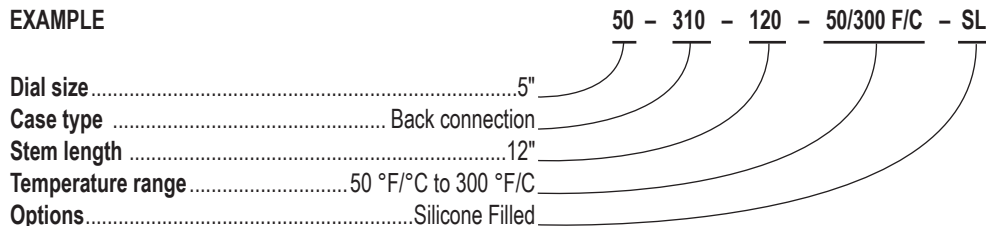




# Dimensions

## 20-310

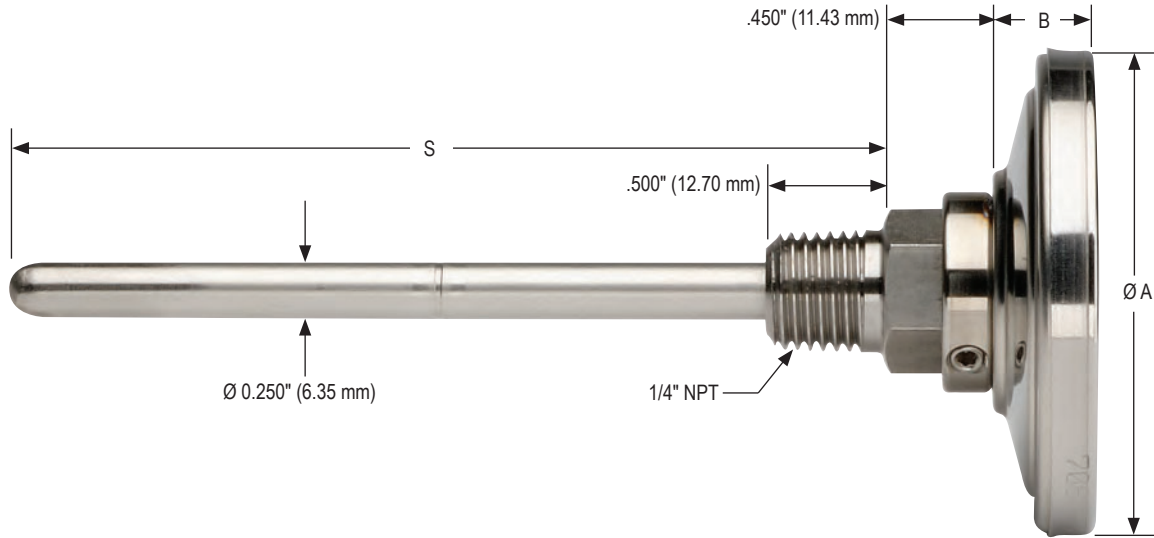


See page 15 for dimension chart.

## 30-310/50-310

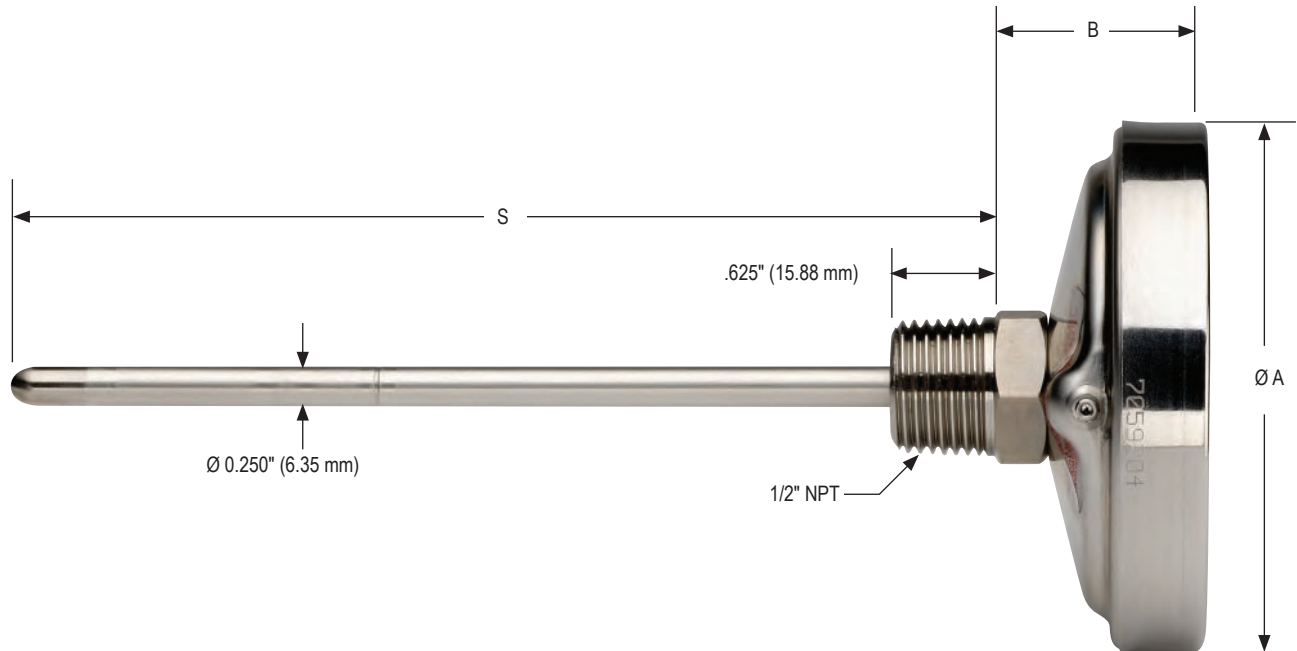


See page 15 for dimension chart.

## 30-300/50-300

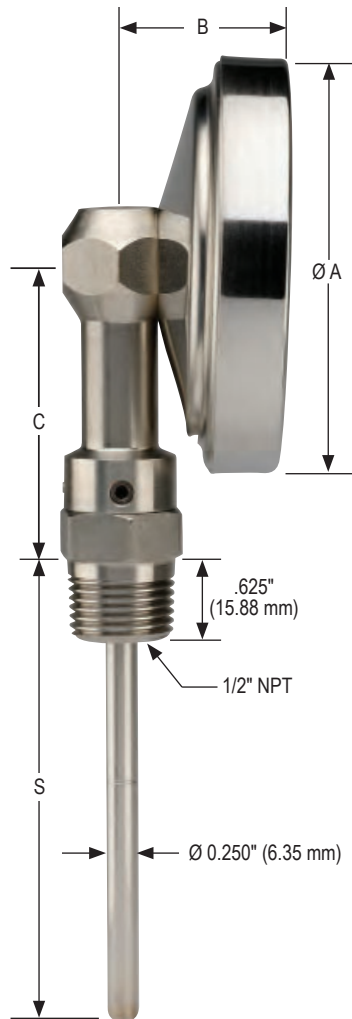

## 30-320/50-320

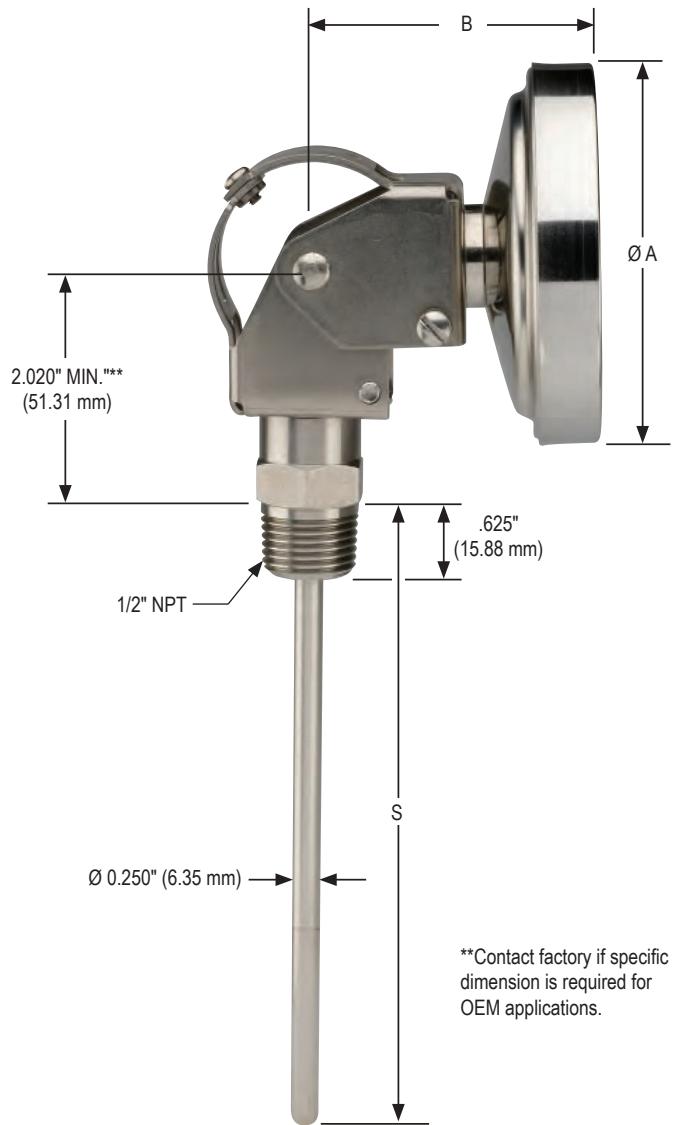


\*\*Contact factory if specific dimension is required for OEM applications.

Series	Ø A	B	C	S (Stem Length)
20-310	2.089" 53.06 mm	.438" 11.13 mm	—	As specified
30-310	3.187" 80.95 mm	1.375" 34.93 mm	—	As specified
50-310	5.040" 128.02 mm	1.718" 43.63 mm	—	As specified
30-300	3.187" 80.95 mm	1.187" 30.15 mm	2.300" (58.42 mm)	As specified
50-300	5.040" 128.02 mm	1.625" 41.28 mm	3.000" (76.20 mm)	As specified
30-320	3.187" 80.95 mm	2.430" 61.72 mm	—	As specified
50-320	5.040" 128.02 mm	2.660" 67.56 mm	—	As specified




## 300 Series Sanitary Bimetal Thermometer

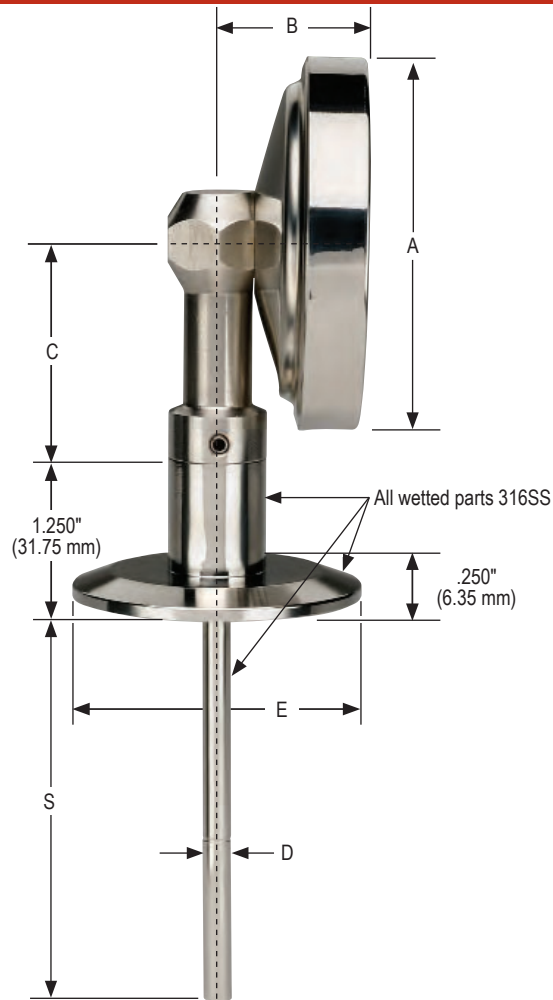


See page 17 for dimension chart.

## 310 Series Sanitary Bimetal Thermometer

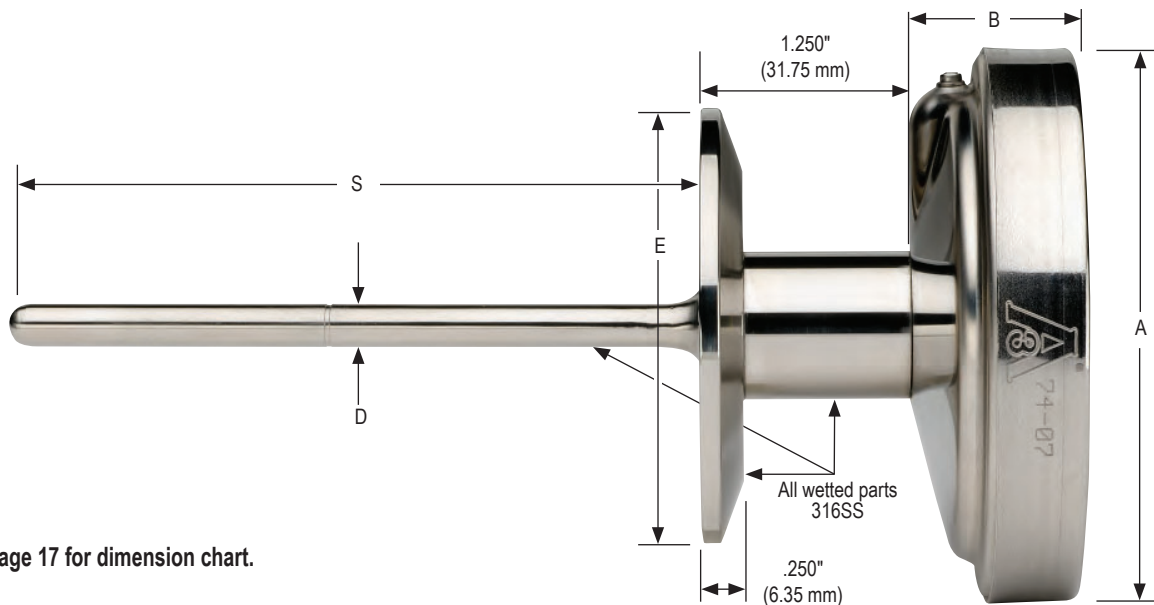

See page 17 for dimension chart.

## 320 Series Sanitary Bimetal Thermometer

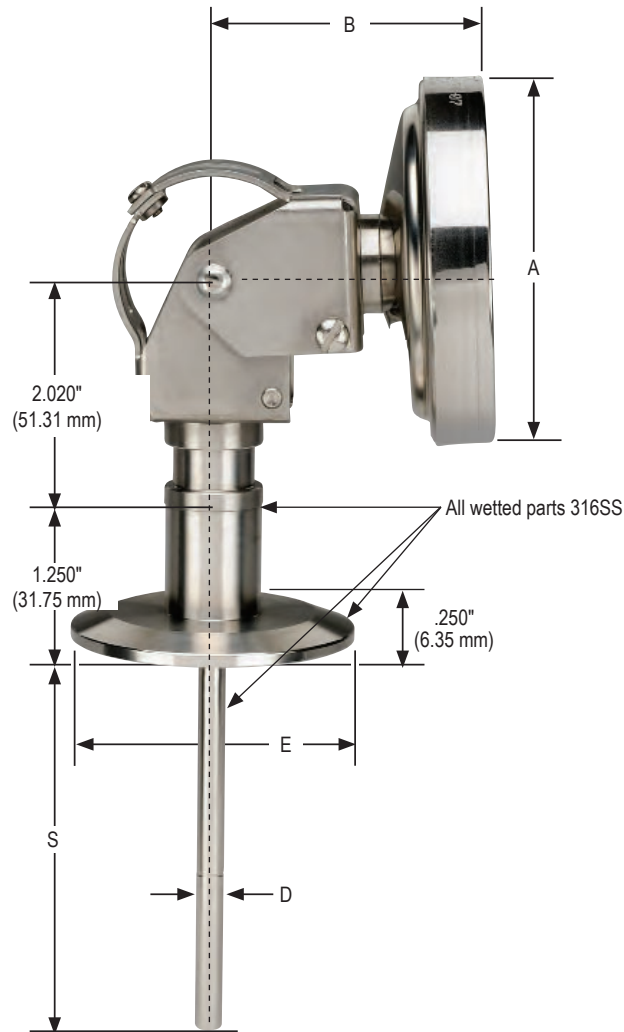

300 SERIES BIMETAL THERMOMETERS - SANITARY TRI-CLAMP® MODELS

Series	A	B	C	D	S (Stem Length)
30-300	3.187" 80.95 mm	1.187" 30.15 mm	1.875" 47.63 mm	.375" 9.53 mm	As specified
30-310	3.187" 80.95 mm	.890" 22.61 mm	—	.375" 9.53 mm	As specified
30-320	3.187" 80.95 mm	2.430" 61.72 mm	—	.375" 9.53 mm	As specified
50-300	5.040" 128.02 mm	1.625" 41.28 mm	2.625" (66.68 mm)	.375" 9.53 mm	As specified
50-310	5.040" 128.02 mm	1.328" 33.73 mm	—	.375" 9.53 mm	As specified
50-320	5.040" 128.02 mm	2.660" 67.56 mm	—	.375" 9.53 mm	As specified

TRI-CLAMP® FITTING

Part Number Designation	Tri-Clamp Connection Size	E
06SAN *	3/4"	.984" 25.00 mm
12SAN **	1-1/2"	1.984" 50.40 mm
16SAN	2"	2.516" 63.90 mm
20SAN	2-1/2"	3.047" 77.40 mm
24SAN	3"	3.579" 90.90 mm
32SAN	4"	4.682" 118.90 mm

\* Used on both 1/2" and 3/4" lines

\*\* Used on both 1" and 1-1/2" lines

# Bimetal, Testing and General Purpose with External Reset

## 350 SERIES



- Designed for general purpose testing applications, featuring a weather-resistant, tamper-proof case
- Pocket sized model is used by inspectors, service and maintenance personnel for spot checking
- A friction adjustment nut design provides easy calibration and maximum accuracy at a selected range
- Single °F, single °C, and dual scale (1-3/4" and 2" models only) options available
- Accuracy: ±1% full scale, Grade A, ASME B40.3
- 1", 1-3/8", 1-3/4", 2" and 3" sizes - center back connection only
- 304 Stainless Steel case and bezel
- Standard stem lengths 5 through 18"
- Highly sensitive bimetallic helix coil is heat-treated for stress relief, and silicone-coated to minimize pointer vibration and maximize heat transfer and response time
- 360° groove around stem is a visual reference to show minimum immersion point
- Adjustable pan clips are standard on 18-350, 20-350 and 30-350 models with 5" and 8" stem lengths
- Made in the U.S.A.

### APPLICATIONS

Used in almost every area of manufacturing, especially suited for laboratory testing and general purpose applications in the following areas:

- Laboratory
- Food & beverage processing
- Concrete
- Asphalt
- OEM equipment
- HVAC

	SERIES	SPECIFICATIONS
<b>Case &amp; bezel</b>	All 350 Series	304 Stainless Steel; 316 Stainless Steel optional
<b>Lens</b>	14-350 All other 350 Series models	Convex Polycarbonate Instrument Glass
<b>Pointer</b>	All 350 Series	Aluminum, black finish
<b>Stem diameter</b>	All 350 Series	.150" (3.81 mm)
<b>Accuracy</b>	All 350 Series	±1% full scale, Grade A, ASME B40.3
<b>Dial</b>	All 350 Series	Anodized Aluminum with large black numbers and graduations
<b>Wetted parts</b>	All 350 Series	304 Stainless Steel; 316 Stainless Steel optional
<b>Hermetic seal</b>	All 350 Series	Per ASME B40.3 dustproof and leakproof
<b>Bimetal coil</b>	All 350 Series	Silicone coated helix coil on ranges below 500 °F for vibration dampening, maximum heat transfer and response time
<b>Over temperature limits</b>	All 350 Series	Up to 250 °F 100%; 250 °F to 550 °F 50%; 550 °F to 1,000 °F continuous use up to 800 °F; intermittent use over 800 °F
<b>Recalibrator</b>	All 350 Series	External reset



**WARNING:** This product can expose you to chemicals including Chromium (VI) and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Thermowells are recommended for pressure, corrosive fluids and high velocity applications, see pages 48-50.



ORDERING INFORMATION					
<b>DIAL SIZES</b>	10	1" **	18	1-3/4"	30 3"
	14	1-3/8" **	20	2"	
<b>CASE TYPES</b>	350	Back connection			
<b>STEM LENGTHS</b>	050	5" **	120	12"	
	080	8" **	180	18"	
<b>TEMPERATURE RANGES</b>	-100/100 F/C	-100 °F/°C to 100 °F/°C	0/250 F/C	0 °F/°C to 250 °F/°C	50/550 F/C 50 °F/°C to 550 °F/°C
<i>Dual Scale °F/ °C</i>	-40/160 F/C	-40 °F/°C to 160 °F/°C	20/240 F/C	20 °F/°C to 240 °F/°C	150/750 F/C 150 °F/°C to 750 °F/°C
<i>(Not available on 1" model)</i>	0/140 F/C	0 °F/°C to 140 °F/°C	25/125 F/C	25 °F/°C to 125 °F/°C	200/1000 F/C 200 °F/°C to 1,000 °F/°C *
	0/180 F/C	0 °F/°C to 180 °F/°C	50/300 F/C	50 °F/°C to 300 °F/°C	
	0/220 F/C	0 °F/°C to 220 °F/°C	50/400 F/C	50 °F/°C to 400 °F/°C	
<i>Single Scale °F</i>	-100/100 F	-100 °F to 100 °F	0/220 F	0 °F to 220 °F **	50/400 F 50 °F to 400 °F
	-50/120 F	-50 °F to 120 °F	0/250 F	0 °F to 250 °F	50/500 F 50 °F to 500 °F **
	-40/160 F	-40 °F to 160 °F **	20/240 F	20 °F to 240 °F	50/550 F 50 °F to 550 °F
	0/140 F	0 °F to 140 °F	25/125 F	25 °F to 125 °F **	150/750 F 150 °F to 750 °F **
	0/180 F	0 °F to 180 °F	50/250 F	50 °F to 250 °F	
	0/200 F	0 °F to 200 °F	50/300 F	50 °F to 300 °F	
<i>Single Scale °C</i>	-75/175 C	-75 °C to 175 °C	-10/110 C	-10 °C to 110 °C **	0/300 C 0 °C to 300 °C
	-50/100 C	-50 °C to 100 °C	0/50 C	0 °C to 50 °C**	0/400 C 0 °C to 400 °C
	-50/25 C	-50 °C to 25 °C	0/100 C	0 °C to 100 °C	
	-50/50 C	-50 °C to 50 °C	0/150 C	0 °C to 150 °C	
	-40/70 C	-40 °C to 70 °C **	0/200 C	0 °C to 200 °C	
	-20/120 C	-20 °C to 120 °C	0/250 C	0 °C to 250 °C **	
Consult factory for additional temperature ranges					
<b>OPTIONS</b>	LL	Polycarbonate Lens	PS	Pocket Sheath***	TG Tempered Glass Lens †
	PL	Acrylic Lens	ST	Stainless Steel Tagging	

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

**Note:** All 316 Stainless Steel construction (case, bezel, wetted parts) is available. Please consult factory.


\* Thermometers with temperature ranges 200/1000 °F and 100/500 °C are not recommended for continuous use above 800 °F/425 °C. **For intermittent use only.**

\*\* 10-350 and 14-350 models are only available in these stem lengths and ranges.

\*\*\* Available for 5" or 8" stem lengths only.


† Not available on 10-350 model. Also not available with Silicone Filled (SL) option.

**EXAMPLE**

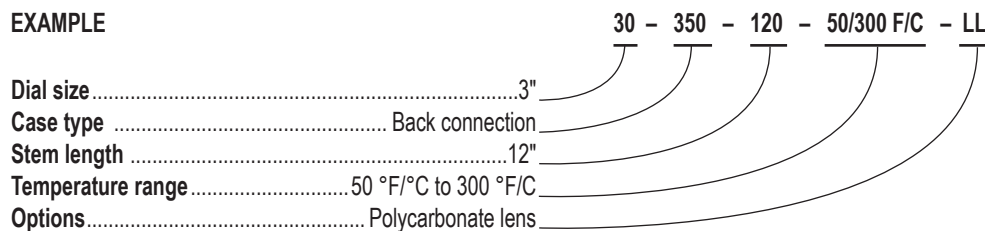


# Dimensions

14-350

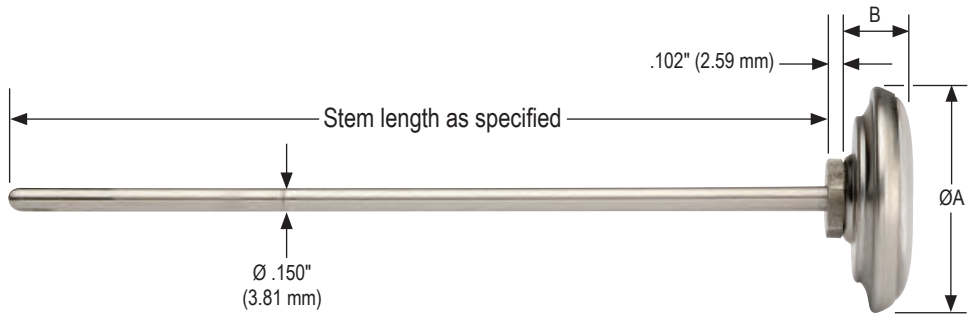

See page 19 for dimension chart.

10-350/18-350/20-350/30-350

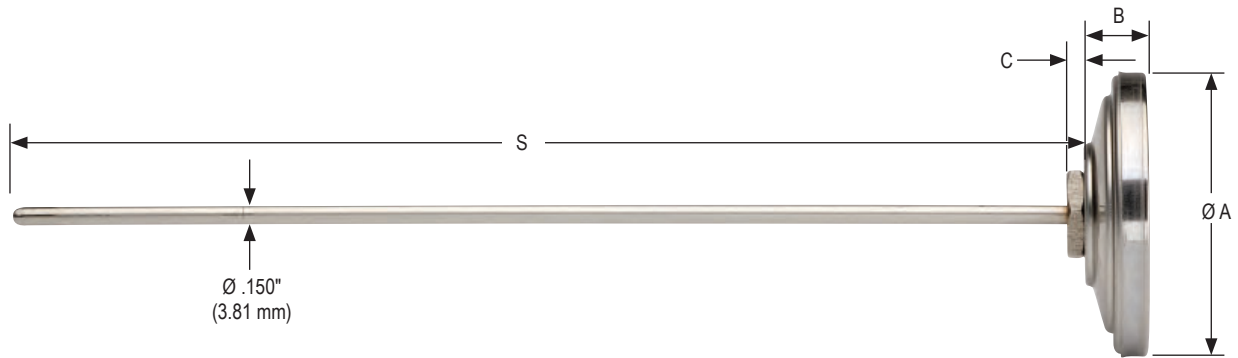

See page 19 for dimension chart.

Series	Ø A	B	C	S (Stem Length)
10-350	1.032" 26.21 mm	.350" 8.89 mm	—	As specified
14-350	1.358" 34.50 mm	.456" 11.58 mm	—	As specified
18-350	1.750" 44.45 mm	.412" 10.47 mm	.102" 2.59 mm	As specified
20-350	2.089" 53.06 mm	.438" 11.13 mm	.120" 3.05 mm	As specified
30-350	3.200" 81.28 mm	.465" 11.81 mm	.120" 3.05 mm	As specified



Pocket Sheath is available on 14-350 (shown left) and 10-350 (shown right) models, with 5" or 8" stem.

# Vapor Actuated Remote

## 300/400/ 600/700 SERIES



- Indicates media temperature using a temperature-actuated liquid in the sensing element and a highly accurate, high quality pressure gauge
- As the media temperature increases, the capillary fill fluid vaporizes, increasing pressure in the Bourdon tube to activate the movement and pointer for proper indication
- Ranges available from -40 °F/C to 60 °F/C through 100 °F/C to 350 °F/C
- 2-1/2", 4", 4-1/2" and 6" sizes
- Brass, Stainless Steel, or Phenolic case
- Dry or liquid filled
- Bottom, back or lower back connected
- Mounting options: front or rear flange, bezel, and u-clamp
- Capillary material: Copper or Stainless Steel
- Bulb material & dimensions: Copper or Stainless Steel, 2-5/8" x 3/8" through 7-5/8" x 3/8"
- The dial scale graduations are non-linear, therefore the highest degree of accuracy and readability is found in the upper half of the scale

### APPLICATIONS

- Power transformers
- Paper mills
- Refineries
- Petrochemical
- Oil and gas
- Chemical
- HVAC/R
- Food processing
- Pharmaceutical

	SERIES	SPECIFICATIONS
<b>Lens</b>	300, 600, 700 Series 400 Series	Acrylic Instrument glass
<b>Pointer</b>	All	Aluminum, black finish
<b>Accuracy</b>	All	±2.0% full scale, Grade B, ASME B40.4
<b>Dial</b>	All	Aluminum, white background, dual scale, black Celsius scale and black Fahrenheit scale

For NOSHOK Vapor Remote Thermometers using 300, 600 & 900 Series Gauges:



**WARNING:** This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

For NOSHOK Vapor Remote Thermometers using 400 & 700 Series Gauges:



**WARNING:** This product can expose you to chemicals including Chromium (VI) and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Thermowells are recommended for pressure, corrosive fluids and high velocity applications, see pages 48-50.


# 300/400/600/700 SERIES ORDERING INFORMATION

ORDERING INFORMATION			
<b>300 SERIES</b>	<b>25-300</b>	2-1/2", Brass case, bottom connection	<b>25-310</b> 2-1/2", Brass case, back connection
<b>400 SERIES</b>	<b>40-400</b>	4", all Stainless, bottom connection	<b>40-410</b> 4", all Stainless, back connection
	<b>60-400</b>	6", all Stainless, bottom connection	<b>60-410</b> 6", all Stainless, back connection
<b>600 SERIES</b>	<b>45-640</b>	4-1/2", Phenolic case/Brass bottom connection	
<b>700 SERIES</b>	<b>45-740</b>	4-1/2", Phenolic case/Stainless bottom connection	
<b>GAUGE FILL FLUIDS</b>	<b>0</b>	Dry gauge	<b>2</b> -40° service
	<b>1</b>	Glycerin	<b>3</b> Silicone
<b>MOUNTING OPTIONS</b>	<b>0</b>	None	<b>3</b> Rear flange <sup>2</sup>
	<b>1</b>	Chrome front flange <sup>1</sup>	<b>4</b> Bezel & u-clamp <sup>3</sup>
	<b>2</b>	Brass front flange <sup>1</sup>	<b>5</b> Stainless Steel front flange <sup>4</sup>
<b>TEMPERATURE RANGES</b>	<b>1</b>	-40 °F/°C to 60 °F/°C	<b>6</b> 30 °F/°C to 180 °F/°C
	<b>2</b>	-20 °F/°C to 120 °F/°C	<b>7</b> 30 °F/°C to 240 °F/°C
	<b>3</b>	0 °F/°C to 250 °F/°C	<b>8</b> 30 °F/°C to 300 °F/°C
	<b>4</b>	0 °F/°C to 300 °F/°C	<b>9</b> 50 °F/°C to 350 °F/°C
	<b>5</b>	20 °F/°C to 220 °F/°C	<b>10</b> 100 °F/°C to 350 °F/°C
<b>CAPILLARY TYPES/MATERIALS</b>	<b>1</b>	Plain Copper	<b>3</b> Plain Stainless Steel
	<b>2</b>	Armored Copper	<b>4</b> Armored Stainless Steel
<b>CAPILLARY LENGTH</b>	<b>##</b>	Specify in feet	
<b>BULB STYLES/MATERIALS</b>	<b>1</b>	Plain Copper	<b>3</b> 1/2" NPT union Copper
	<b>2</b>	Plain Stainless Steel	<b>4</b> 1/2" NPT union Stainless Steel
<b>BULB DIMENSIONS</b>	<b>1</b>	2-5/8" x 3/8"	<b>6</b> 4" x 3/8"
	<b>2</b>	4-1/2" x 3/8"	<b>7</b> 9" x 3/8"
	<b>3</b>	8" x 3/8"	<b>8</b> 7-5/8" x 3/8"
	<b>4</b>	3-1/2" x 3/8"	<b>15</b> 6" x 1/2" <sup>5</sup>
	<b>5</b>	6" x 3/8"	
<b>OPTIONS</b>	<b>CC</b>	Certified Calibration	

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

- \* Not available for gauge sizes ≥4" or ≥16' capillary
- <sup>1</sup> Only available on 300 Series
- <sup>2</sup> Not available on 600/700 Series
- <sup>3</sup> Only available on back connection case types
- <sup>4</sup> Only available on 400 Series
- <sup>5</sup> 4" gauge or larger requires 6" bulb



**EXAMPLE**

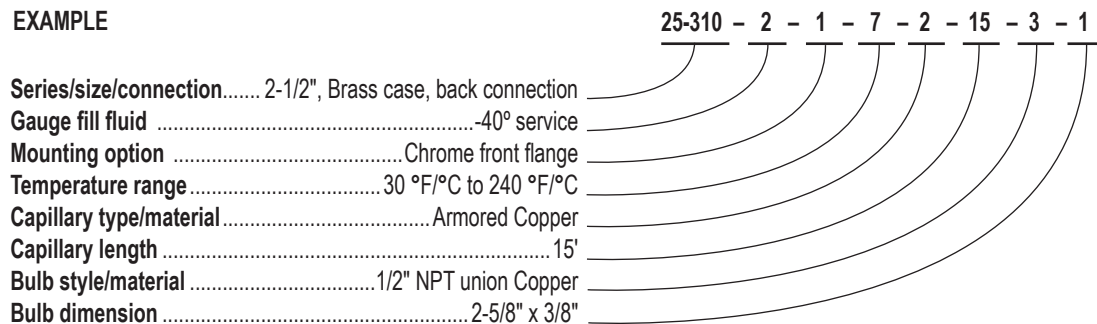







# Dimensions

**25-300** **25-310**

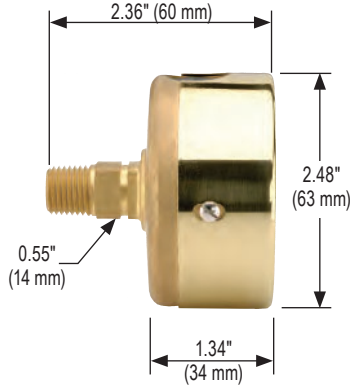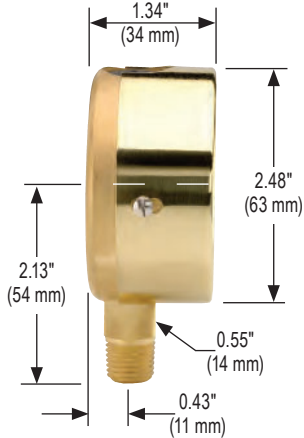


**25-300 Front Flange** **25-310 Front Flange**

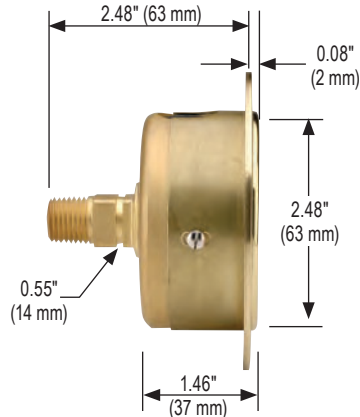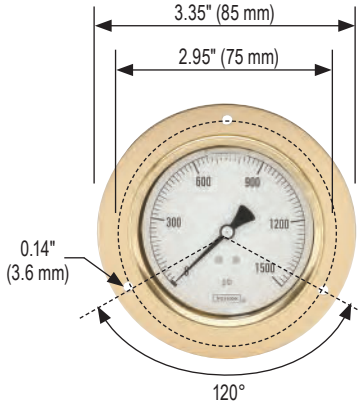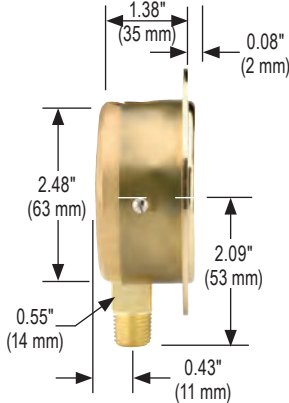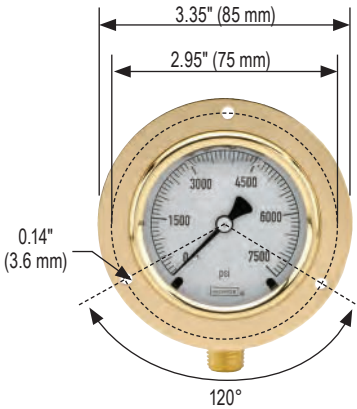


# 300/400/600/700 SERIES DIMENSIONS

## 25-300 Rear Flange

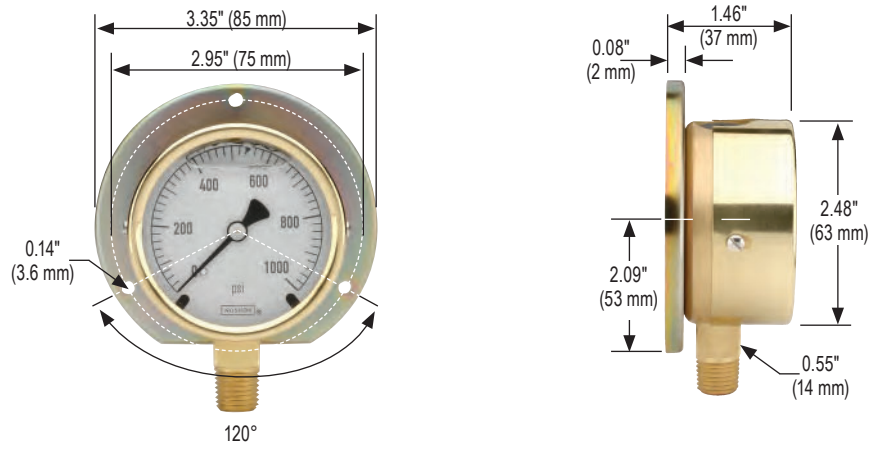

## 25-310 Rear Flange


## 25-310 Chrome Bezel with U-Clamp

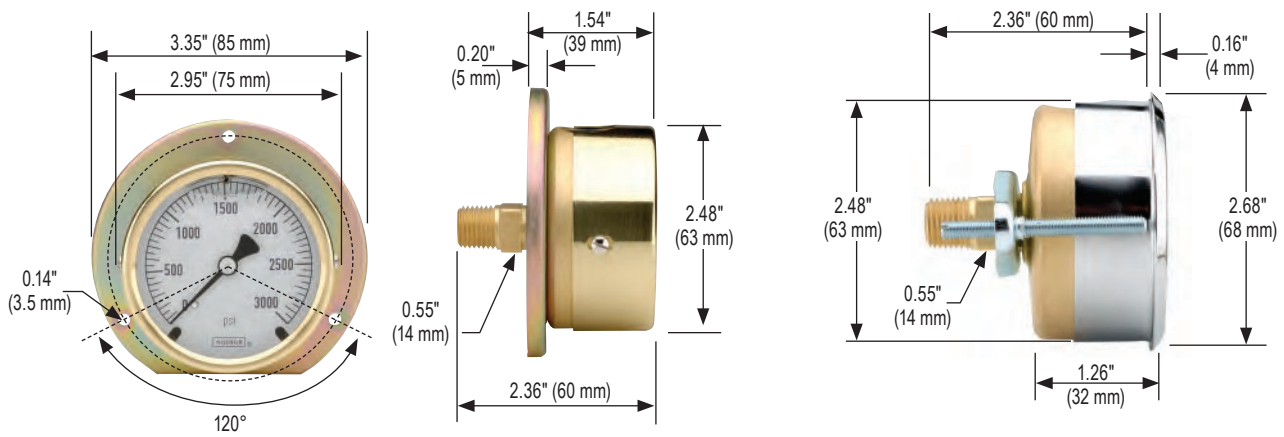




# 300/400/600/700 SERIES DIMENSIONS


## 40-410 Front Flange

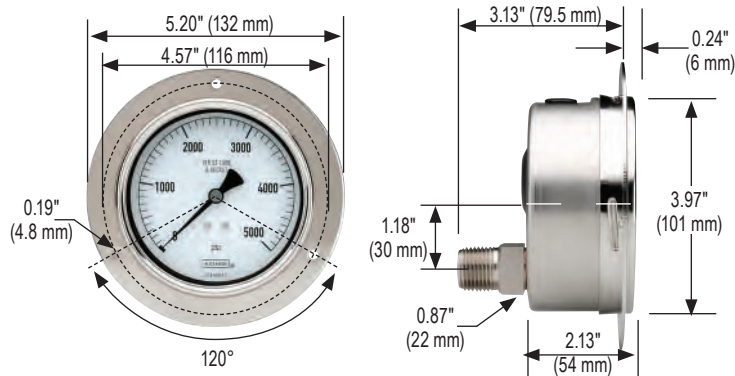


## 60-410 Front Flange

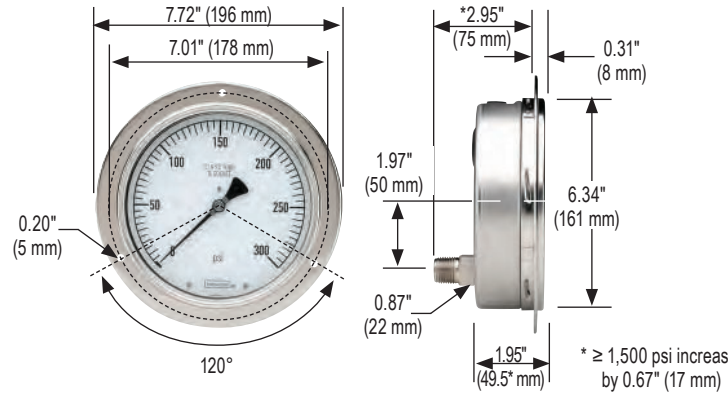

## 40-400 Rear Flange


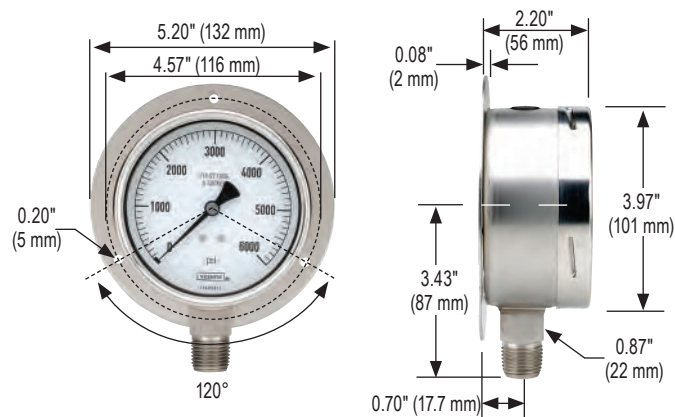


## 60-400 Rear Flange


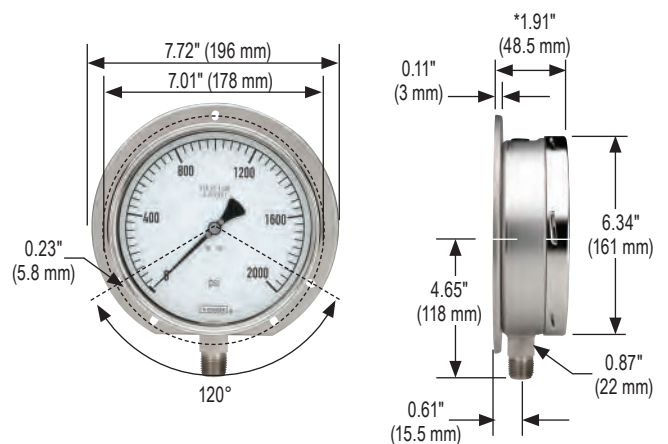


# Dimensions

**40-410 Rear Flange** **60-410 Rear Flange**

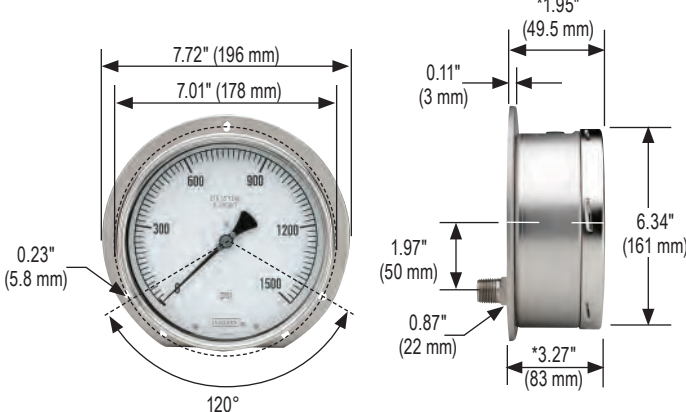
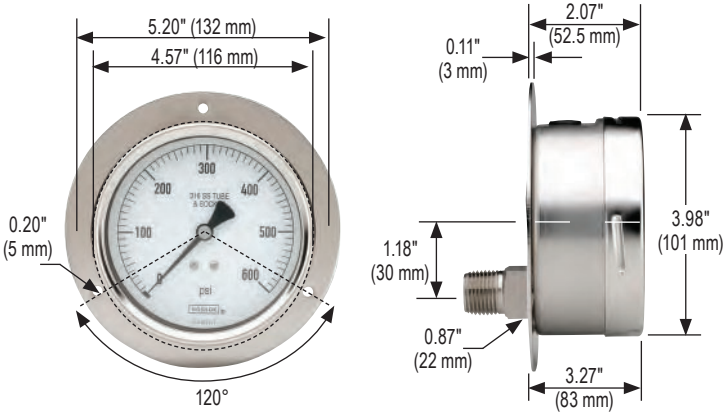


**40-410/510 SS Bezel w/U-Clamp** **60-410 SS Bezel w/U-Clamp**

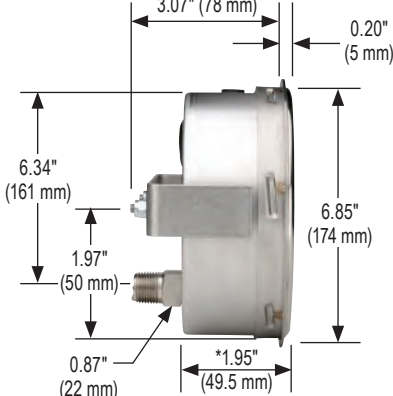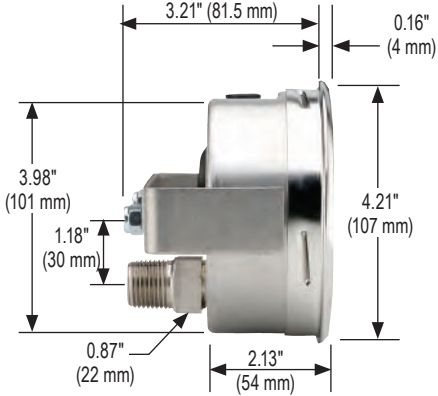

# 300/400/600/700 SERIES DIMENSIONS

## 45-640 & 45-740

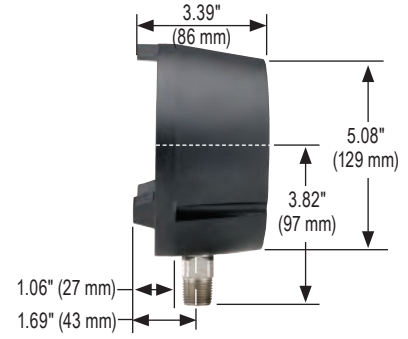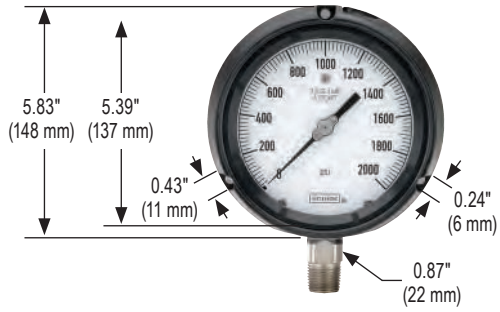

# Dial Indicating Thermometer Options

## ADJUSTABLE UNION CONNECTION

- Can be used to reposition the dial face for better viewing
- Also helpful when installing a thermometer where space is limited

## CERTIFIED CALIBRATION

- Available on all NOSHOK thermometers
- Certified calibration provides the user with a serial numbered thermometer along with a calibration sheet against a primary temperature standard
- Traceable to the National Institute of Standards and Technology

## CONNECTIONS

- In addition to our standard 1/2" NPT connection, 1/4" , 3/8" NPT and metric connections are also available
- If a special connection is required, please consult the factory
- Other options include a plain stem with an adjustable compression fitting, or left, right or top connections

## GLOW DIAL (GD)

- Allows up close daylight and/or distant night time viewing
- 5" Adjustable angle or back connect
- Reflective Pointer
- Two reflective clips included to indicate custom minimum and maximum limits

## LENSES

- Laminated safety glass lenses are available on all 3" and 5" NOSHOK bimetal thermometers
- Acrylic and polycarbonate lenses are available on all NOSHOK bimetal thermometers also, however they should not be used where case temperature exceeds 300 °F/150 °C

## MINIMUM OR MAXIMUM INDICATING POINTER (MIP)

- The MIP allows you to view your minimum **or** maximum temperatures for visual clarification of safe operation
- Available only on 30-310 and 50-310 models





### MINIMUM AND MAXIMUM INDICATING POINTER (MIP2)

- The MIP2 allows you to view your minimum **and** maximum temperatures for visual clarification of safe operation
- Available only on 30-310 and 50-310 models

### MOUNTING FLANGES

- Various sizes and types of mounting flanges are available

### SILICONE FILLED

- All 2", 3" and 5" NOSHOK Industrial bimetal thermometers are offered in a filled version
- For applications where severe vibration may be a factor
- Silicone dampens and lubricates the internal mechanism thus reducing pointer oscillation and premature wear
- A polycarbonate lens is standard with a silicone filled thermometer
- Maximum case temperature not to exceed 300 °F (150 °C)

### SPECIAL DIALS

- Special ranges and dials with company names, company logos, part numbers, telephone numbers, or almost any custom layout is available

### STEM TYPES

- The 304 Series Stainless Steel stem is welded at the tip and case for hermetic seal
- 1/4" (6.35 mm) diameter is standard for lengths up to 24" (609 mm)
- 3/8" diameter, sharp tip options and optional 316SS wetted parts are also available



# Platinum Resistance Temperature Transmitter



## 800 SERIES



- Proven 100 Ω platinum resistance sensor provides reliability, stability and unbeatable performance
- Economical price
- Standard temperature ranges from -40 °F to 120 °F through 50 °F to 400 °F
- Wide variety of temperature ranges and connections
- Quick response time
- 316 Stainless Steel housing
- Burnout protection from 3.3 mA to 23 mA
- Also available with our 1800 Series attachable loop indicator
- CE compliant to suppress RFI, EMI, and ESD

### APPLICATIONS

- Water systems
- Storage tanks
- Industrial machinery and machine tools
- HVAC systems
- Refrigeration systems



Also available with our 1800 Series attachable loop indicator. See [www.noshok.com](http://www.noshok.com) for details.

### SPECIFICATIONS

<b>Output signals</b>	4 mA to 20 mA 2-wire, 0 Vdc to 5 Vdc 3-wire 0 Vdc to 10 Vdc 3-wire, 1 Vdc to 5 Vdc 3-wire
<b>Temperature ranges</b>	Standard ranges from -40 °F to 400 °F
<b>Accuracy</b>	
<b>Measuring element</b>	Class B per EN 60751 (IEC 751)
<b>Output</b>	±[0.30 +0.005* t ] °C ±0.5% full scale
<b>Sensor protection</b>	Burnout protected from 3.3 mA to 23 mA
<b>Power requirement*</b>	10 Vdc to 30 Vdc (4 mA to 20 mA, 2-wire) 10 Vdc to 30 Vdc (0 Vdc to 5 Vdc, 3-wire) 10 Vdc to 30 Vdc (1 Vdc to 5 Vdc, 3-wire) 14 Vdc to 30 Vdc (0 Vdc to 10 Vdc, 3-wire)
<b>Load limitations</b>	≤ (VPower -10)/0.020 Amp for 4 mA to 20 mA output ≤ 5,000 Ω for 1 Vdc to 5 Vdc output ≤ 10,000 Ω for 0 Vdc to 10 Vdc output ≤ 4,500 Ω for 0.5 Vdc to 4.5 Vdc output
<b>Wetted materials</b>	316 Stainless Steel
<b>Housing material</b>	316 Stainless Steel
<b>Max. operating pressure</b>	6 mm: 725 psi 8 mm: 1,500 psi
<b>Ambient temperature</b>	-40 °F to 185 °F (-40 °C to 85 °C)
<b>Storage temperature</b>	-40 °F to 185 °F (-40 °C to 85 °C)
<b>Environmental protection</b>	IP65 according to EN 60529/IEC 529
<b>Electromagnetic rating</b>	CE compliant to EMC norm EN 61326:1997/A1:1998 RFI, EMI and ESD protection
<b>Electrical protection</b>	Reverse polarity, over-voltage and short circuit protection
<b>Weight</b>	Approximately 4 oz.

\* Unregulated




**WARNING:** This product can expose you to chemicals including Chromium (VI) and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Thermowells are recommended for pressure, corrosive fluids and high velocity applications, see pages 48-50.


ORDERING INFORMATION				
<b>SERIES</b>	<b>800</b>			
<b>TEMPERATURE RANGES</b>	<b>-40/120</b>	-40 °F to 120 °F	<b>0/200</b>	0 °F to 200 °F
	<b>0/100</b>	0 °F to 100 °F	<b>0/250</b>	0 °F to 250 °F
	<b>0/140</b>	0 °F to 140 °F	<b>20/240</b>	20 °F to 240 °F
<b>ACCURACY</b>	1 Class B + (±0.5% BFSL)			
<b>OUTPUT SIGNALS</b>	<b>1</b>	4 mA to 20 mA, 2-wire	<b>3</b>	1 Vdc to 5 Vdc, 3-wire
	<b>2</b>	0 Vdc to 5 Vdc, 3-wire	<b>5</b>	0 Vdc to 10 Vdc, 3-wire
<b>PROCESS CONNECTIONS</b>	<b>2</b>	1/4" NPT Male	<b>48</b>	1/2" NPT Male w/adjustable compression fitting
	<b>8</b>	1/2" NPT Male		
<b>ELECTRICAL CONNECTIONS</b>	<b>1</b>	DIN EN 175301-803 Form A with 36" cable	<b>14</b>	DIN EN 175301-803 Form A with ISO 4400 1/2" NPT female conduit
	<b>8</b>	DIN EN 175301-803 Form A	<b>25</b>	M12 x 1 (4-pin)
<b>STEM LENGTHS</b>	<b>025</b>	2.5"	<b>060</b>	6"
	<b>040</b>	4"	<b>090</b>	9"
<b>STEM DIAMETERS</b>	<b>6</b>	6 mm	<b>8</b>	8 mm

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.


### EXAMPLE

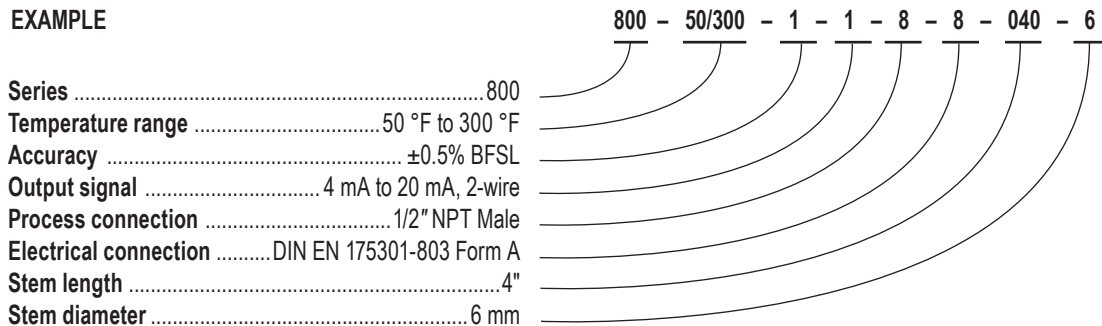

## 800 Series Platinum Resistance Temperature Transmitter

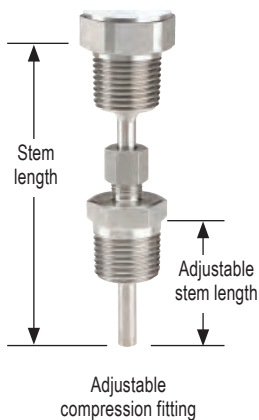

Load Limitations 4 mA to 20 mA output	
Vmin	= 10V + (.020 x RL)
RL	= Loop resistance (Ω)
RS	= Sensor resistance (Ω)
RW	= Wire resistance (Ω)

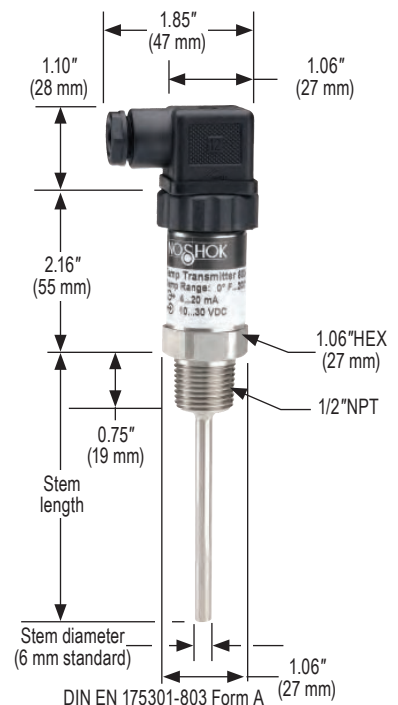

800 Series	4 mA to 20 mA	
CONNECTION TYPE (CODE)	V+	V-
DIN EN 175301-803 Form A (8 or 14)	1	2
DIN EN 175301-803 Form A w/ Cable (1)	Red	Black
M12 x 1, 4-Pin (25)	1	3

800 Series	0-10 Vdc		
CONNECTION TYPE (CODE)	V+	COMMON	OUTPUT
DIN EN 175301-803 Form A (8 or 14)	1	2	3
DIN EN 175301-803 Form A w/ Cable (1)	Red	Black	White
M12 x 1, 4-Pin (25)	1	3	4



# 810 SERIES

- Proven PT1000 platinum resistance sensor provides reliability, stability and unbeatable performance
- Standard temperature ranges from -22 °F to 302 °F (-30 °C to 150°C)
- 4 mA to 20 mA transmitter included
- 316 Stainless Steel housing
- CE compliant to suppress RFI, EMI, and ESD
- RoHS compliant

## APPLICATIONS

- Mobile hydraulics
- Automotive
- Heat exchangers
- HVAC
- Transportation
- Refrigeration controls

## SPECIFICATIONS

<b>Output signal</b>	4 mA to 20 mA, 2-wire
<b>Temperature ranges</b>	Standard ranges from -22 °F to 302 °F (-30 °C to 150°C)
<b>Accuracy</b>	Measuring element PT1000 Class A
	Temperature sensor For °F: $\pm[1.8*(0.15 + 0.002 (t - 32) / 1.8)]$ For °C: $\pm(0.15 K + 0.002  t )$ per EN 60751
	Accuracy <sup>1,2</sup> $\pm 0.80$ °F (+- 0.45 °C)
<b>Failure signal</b>	Sensor burnout $\geq 21.0$ mA
	Sensor short circuit $\leq 3.6$ mA
<b>Power requirement*</b>	10 Vdc to 30 Vdc
<b>Environmental temperature affect</b>	0.1% of span / 18 °F (10 °C)
<b>Load limitations</b>	$\leq (\text{Supply Voltage} - 10 \text{ Volts}) / 0.023 \text{ A}$
<b>Wetted materials</b>	316 Stainless Steel
<b>Housing material</b>	316 Stainless Steel
<b>Ambient temperature</b>	-40°F to 185 °F (-40°C to 85 °C)
<b>Storage temperature</b>	-40°F to 185 °F (-40°C to 85 °C)
<b>Electromagnetic rating</b>	CE compliant to EMC norm EN 61326 RFI, EMI and ESD protection
<b>Electrical protection</b>	Reverse polarity, over-voltage and short circuit protection
<b>Max. operating pressure</b>	3,915 psi (270 bar) <sup>3</sup>
<b>Environmental protection</b>	IP67

\* Unregulated

<sup>1</sup> Maximum uncertainty calculated @ maximum span, maximum measurement temperature, and ambient temperature

<sup>2</sup> Maximum uncertainty includes Usensing element, Usensor measurement, Uoutput linearization

<sup>3</sup> Pressure rating may vary based on the process medium, temperature and flow rate




**WARNING:** This product can expose you to chemicals including Chromium (VI) and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Thermowells are recommended for pressure, corrosive fluids and high velocity applications, see pages 46-48.


ORDERING INFORMATION			
SERIES	810		
TEMPERATURE RANGES	-22/125 -22 °F to 125 °F	-22/302 -22 °F to 302 °F	0/200 0 °F to 200 °F
	-22/250 -22 °F to 250 °F	0/100 0 °F to 100 °F	0/300 0 °F to 300 °F
	(L/H) Custom ranges available on request, specify low and high ranges (70 °F minimum span)		
ACCURACY	1 PT1000 Class A ±0.8 °F (±0.45 °C)		
OUTPUT SIGNAL	1 4 mA to 20 mA, 2-wire		
PROCESS CONNECTIONS	2 1/4" NPT Male	8 1/2" NPT Male	
ELECTRICAL CONNECTION	25 M12 x 1 (4-pin)		
STEM LENGTHS	010 1"	030 3"	080 8"
	020 2"	040 4"	120 12"
	025 2.5"	060 6"	140 14"
STEM DIAMETER	6 6 mm		

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

**EXAMPLE**

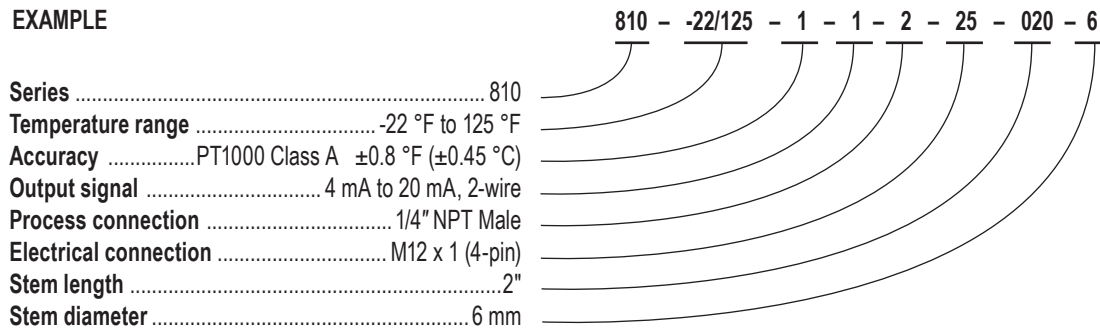

## 810 Series Compact Temperature Transmitter

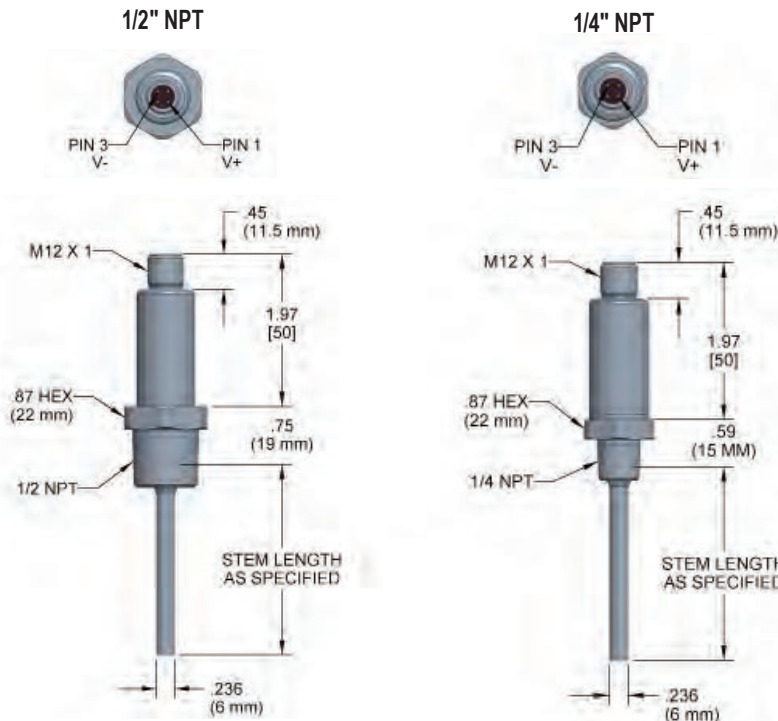

810 Series	4 mA to 20 mA	
CONNECTION TYPE (CODE)	V+	V-
M12 x 1, 4-Pin (25)	1	3

Load Limitations 4 mA to 20 mA output	
V <sub>min</sub>	= 10V + (.020 x RL)
RL	= Loop resistance (Ω) RL = RS + RW
RS	= Sensor resistance (Ω)
RW	= Wire resistance (Ω)

# Digital Temperature Indicators



## 820/821 SERIES

- Large 4-digit LED display
- Field re-programmable with optional PC interface module and software
- Software includes a security feature to prevent accidental re-programming
- 4 mA to 20 mA programmable linearized output signal
- Utilizes a self-calibration feature for accurate and stable performance
- Optional fully programmable switch output; relay or transistor
- Utilizes a PT100 Ω RTD Class A element for temperature sensing
- M12 x 1 (5-pin) plug or 36" integral cable electrical connection
- IP 65 / NEMA 4 rated environmental protection
- All 316 Stainless Steel construction
- Easy installation with various mounting configurations

### APPLICATIONS

- Replacement for bimetal, liquid bulb and glass thermometers
- Pharmaceutical
- Food preparation
- Utilities and municipal refineries
- Chemical and petrochemical plants
- Paper mills
- Hydraulics

Thermowells are recommended for pressure, corrosive fluids and high velocity applications, see pages 48-50.

### SPECIFICATIONS

<b>Temperature ranges</b>	Standard ranges from -325 °F to 1,100 °F (-200 °C to 600 °C) Customer rescalable with optional PC interface and software
<b>Temperature sensor</b>	RTD (PT100 DIN EN 60751, Class A)
<b>Housing material</b>	316 Stainless Steel
<b>Probe material</b>	316 Stainless Steel standard
<b>Maximum pressure</b>	500 psig (on probe)
<b>Power requirement</b>	9-36 Vdc, polarity protected
<b>Supply effect</b>	0.005%/V
<b>Power consumption</b>	15 mA @ 24 Vdc + output current – 950 mW max. 20 mA @ 24 Vdc for PNP output – 500 mW max. 20 mA @ 24 Vdc + sourcing current for NPN output 50 mA @ 24 Vdc for relay output – 1200 mW max.
<b>Current output</b>	4 mA to 20 mA (3-wire configuration) linear to temperature
<b>Max load on current output</b>	(Vsupply-9V) / 20 mA, Ω
<b>Optional switching output</b>	Relay SPDT 0.5A @ 240 Vac or Transistor NPN (max 100 mA source) or Transistor PNP (max 100 mA sink)
<b>Optional switching logic</b>	N.C. or N.O. software selectable
<b>Optional switching ranges</b>	Customer programmable between -325 °F to 1,100 °F (-200 °C to 600 °C)
<b>Isolation</b>	500 Vdc input/output (between probe and output signal)
<b>Electrical connection</b>	M12 x 1 (5-pin) or integral cable
<b>Hysteresis</b>	1% of range standard; customer programmable optional
<b>Accuracy</b>	≤0.22% full scale; ≤0.1% full scale optional
<b>Open circuit detection</b>	Upscale (22 mA) or downscale (2.5 mA) current output. Error message on LED display
<b>Warm-up</b>	30 seconds
<b>Response time</b>	0.5 sec to 30 sec (software selectable)
<b>Display</b>	4-digit LED, decimal point selectable by software
<b>Display resolution</b>	±0.02% F.S. ±1 digit
<b>RFI effect</b>	1% or less typical
<b>Temperature ranges</b>	Ambient -40 °F to 176 °F (-40 °C to 80 °C) Effect <0.01% FS/°C Storage -58 °F to 185 °F (-50 °C to 85 °C)
<b>Environmental protection</b>	NEMA 4/ IP 65



**WARNING:** This product can expose you to chemicals including Chromium (VI) and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)




ORDERING INFORMATION					
<b>SERIES</b>	<b>820</b> Bottom connection	<b>821</b> Back connection			
<b>ACCURACY</b>	<b>1</b> ≤0.22% full scale	<b>2</b> ≤0.1% full scale			
<b>OUTPUT</b>	<b>1</b> 4 mA to 20 mA				
<b>BURNOUT</b>	<b>U</b> Upscale	<b>D</b> Downscale			
<b>PROCESS CONNECTIONS</b>	<b>0</b> None	<b>8</b> 1/2" NPT Male			
	<b>2</b> 1/4" NPT Male	<b>48</b> 1/2" NPT Male w/sliding compression fitting*			
<b>TEMPERATURE RANGES</b>	<b>-50/120</b> -50 °F to 120 °F	<b>-50/400</b> -50 °F to 400 °F	<b>32/200</b> 32 °F to 200 °F	<b>32/400</b> 32 °F to 400 °F	
	<b>-50/300</b> -50 °F to 300 °F	<b>32/120</b> 32 °F to 120 °F	<b>32/300</b> 32 °F to 300 °F		
<b>ELECTRICAL CONNECTIONS</b>	<b>36</b> Integral cable 36"	<b>48</b> M12 x 1 (5-pin)			
<b>STEM LENGTHS</b>	<b>025</b> 2.5"	<b>060</b> 6"	<b>120</b> 12"	<b>180</b> 18"	
	<b>040</b> 4"	<b>090</b> 9"	<b>150</b> 15"	<b>240</b> 24"	
<b>STEM DIAMETERS</b>	<b>2</b> 1/4"	<b>3</b> 3/8"	<b>4</b> 1/2"	<b>6</b> 6 mm	


Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

\* Add 2" to stem length for this option.


### EXAMPLE

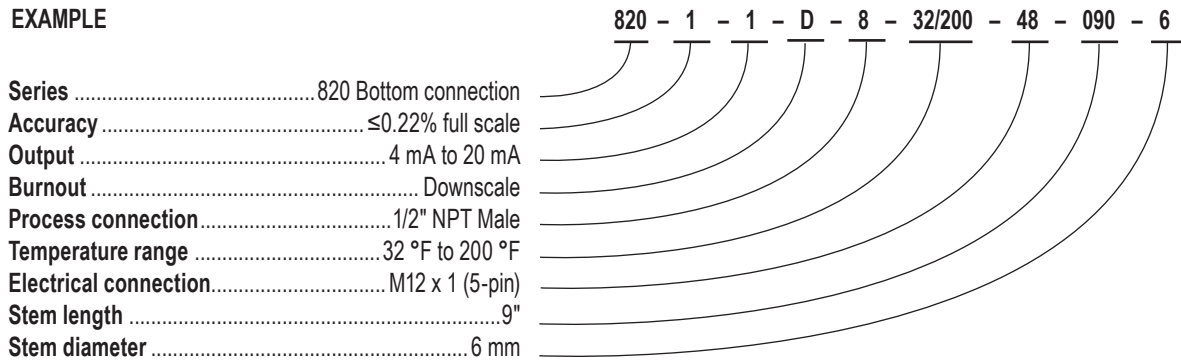

### 820 Series

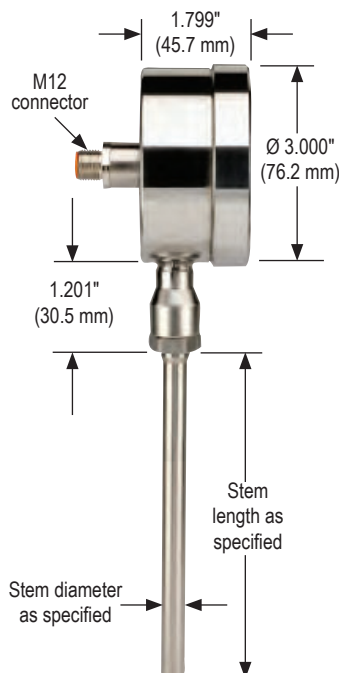

### 821 Series

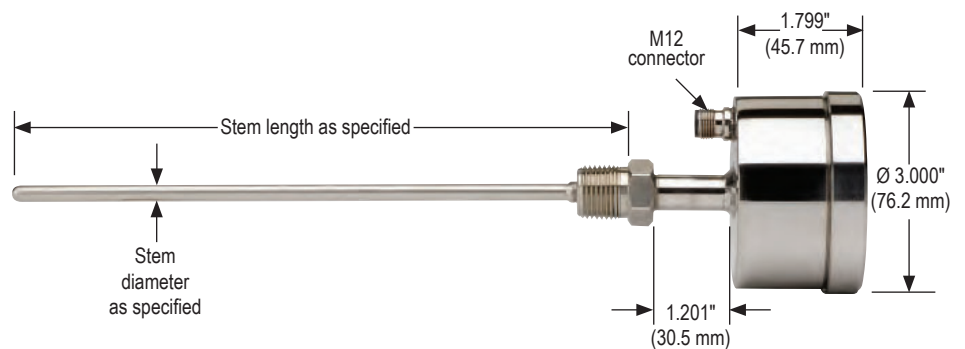



# Digital Temperature Indicators, Battery Powered



## 822/823 SERIES

- 5 year minimum battery life
- Large 4-digit LCD display
- Utilizes a PT100  $\Omega$  RTD Class A element for temperature sensing
- IP 65 / NEMA 4 rated environmental protection
- All 316 Stainless Steel construction
- Easy installation with various mounting configurations

### APPLICATIONS

- Replacement for bimetal, liquid bulb and glass thermometers
- Pharmaceutical
- Food preparation
- Utilities and municipal refineries
- Chemical and petrochemical plants
- Paper mills
- Hydraulics

### SPECIFICATIONS

<b>Temperature ranges</b>	Standard ranges from -58 °F to 392 °F (-50 °C to 200 °C)
<b>Temperature sensor</b>	RTD (PT100 DIN EN 60751, Class A)
<b>Housing material</b>	316 Stainless Steel
<b>Probe material</b>	316 Stainless Steel standard
<b>Maximum pressure</b>	500 psig (on probe)
<b>Power requirement</b>	Lithium battery (3.6 V)
<b>Supply effect</b>	0.005%/V
<b>Accuracy</b>	$\leq 0.22\%$ full scale; $\leq 0.1\%$ full scale optional
<b>Display</b>	4-digit LCD
<b>Display resolution</b>	$\pm 0.02\%$ F.S. $\pm 1$ digit
<b>RFI effect</b>	1% or less typical
<b>Temperature ranges</b>	Ambient -40 °F to 176 °F (-40 °C to 80 °C) Effect <0.01% FS/°C Storage -58 °F to 185 °F (-50 °C to 85 °C)
<b>Environmental protection</b>	NEMA 4/ IP 65

Thermowells are recommended for pressure, corrosive fluids and high velocity applications, see pages 48-50.



**WARNING:** This product can expose you to chemicals including Chromium (VI) and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)


ORDERING INFORMATION				
<b>SERIES</b>	<b>822</b> Bottom connection	<b>823</b> Back connection		
<b>ACCURACY</b>	<b>1</b> ≤0.22% full scale	<b>2</b> ≤0.1% full scale		
<b>PROCESS CONNECTIONS</b>	<b>0</b> None	<b>8</b> 1/2" NPT Male		
	<b>2</b> 1/4" NPT Male	<b>48</b> 1/2" NPT Male w/sliding compression fitting*		
<b>TEMPERATURE RANGE</b>	<b>-58/392</b> -58 °F to 392 °F	<b>-50/200C</b> -50 °C to 200 °C		
<b>STEM LENGTHS **</b>	<b>025</b> 2.5"	<b>060</b> 6"	<b>120</b> 12"	<b>180</b> 18"
	<b>040</b> 4"	<b>090</b> 9"	<b>150</b> 15"	<b>240</b> 24"
<b>STEM DIAMETERS</b>	<b>2</b> 1/4"	<b>4</b> 1/2"	<b>8</b> 8 mm	
	<b>3</b> 3/8"	<b>6</b> 6 mm		

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.


\* Add 2" to stem length for this option.

\*\* Consult factory for additional stem length options.


**EXAMPLE**

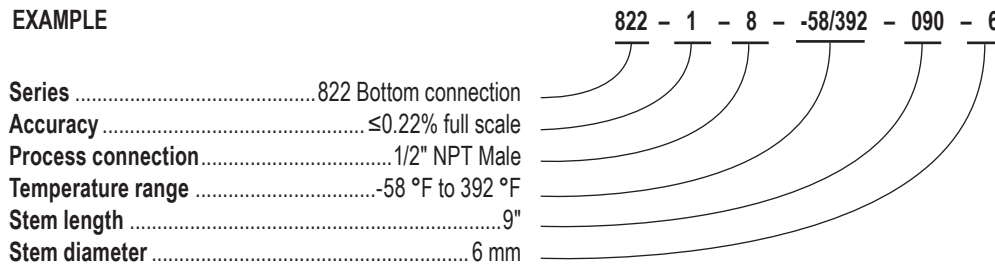

**822 Series**

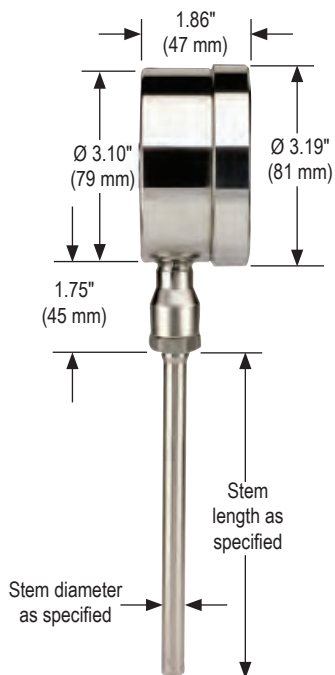

**823 Series**

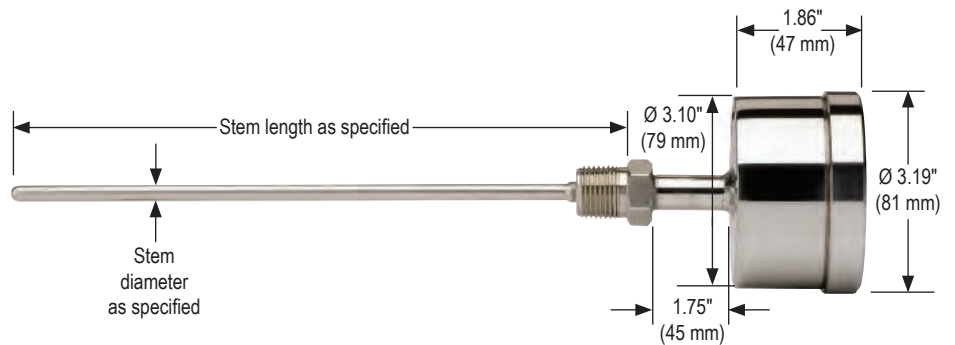



## 850 SERIES

- Utilizes PT1000 technology for continuous temperature monitoring, electronic temperature switching, and transmission of analog output while providing local digital indication
- Allows for one or two switching outputs as well as optional current and voltage outputs
- Three buttons on top allow simple adjustment of the temperature set points, reset points, switching functions and the measuring range of the optional analog output
- 1/2" NPT Male standard connection
- A variety of stem lengths are available for maximum versatility; also available with adjustable insertion lengths via the sliding compression fitting
- Durable stainless steel housing and wetted parts
- Display and electrical connection can be rotated independently
- RoHS compliant

### SPECIFICATIONS

<b>Temperature ranges</b>	Standard -4 °F to 176 °F (-20 °C to 80 °C) Optional -4 °F to 248 °F (-20 °C to 120 °C) Selectable display for °F or °C
<b>Temperature sensor</b>	Platinum resistor (PT1000 2-wire, DIN EN 60751 Class A)
<b>Wetted materials</b>	316Ti stainless steel
<b>Housing material</b>	304 Stainless steel
<b>Max. operating pressure</b>	2,000 psi (1/2" NPT Male fixed process connection); 725 psi (1/2" NPT Male sliding compression fitting process connection)
<b>Power requirement*</b>	15 Vdc to 35 Vdc
<b>Signal output adjustment</b>	Zero point: 0-25% of span Full scale: 75-100% of span
<b>Switch points</b>	Individually adjustable via external control keys
<b>Number</b>	1 or 2 (PNP)
<b>Function</b>	N.O. / N.C.; windows-and hysteresis function freely adjustable
<b>Adjustment accuracy</b>	≤ 0.5% of span
<b>Switch rating</b>	Max. 250 mA
<b>Electrical connection</b>	M12 x 1 (4-pin), M12 x 1 (5-pin)
<b>Accuracy</b>	
<b>Analog signal</b>	≤ ±0.5% of span + temperature sensor error
<b>Switching output</b>	≤ ±0.8% of span + temperature sensor error
<b>Display</b>	≤ ±(0.8% of span + temperature sensor error) ±1 digit
<b>Temperature sensor</b>	For °F: ±[1.8*(0.15 + 0.002 (t - 32) / 1.8)] For °C: ±(0.15 K + 0.002  t ) per EN 60751
<b>Display</b>	14 segment-LED, red 4-digit, height 0.35"
<b>Environmental protection</b>	IP65 and IP67 (IEC 60529)

\* Unregulated

### APPLICATIONS

- Mechanical engineering
- Heating and cooling circuits
- Air conditioning technology
- Plant construction
- Environmental technology


Thermowells are recommended for pressure, corrosive fluids and high velocity applications, see pages 48-50.

ORDERING INFORMATION			
<b>SERIES</b>	850		
<b>SWITCH FUNCTIONS</b>	1 2 N.O. or 2 N.C. switch (PNP *) 2 1 N.O. or 1 N.C. switch (PNP *) with 4 mA to 20 mA 3-wire analog output 3 1 N.O. or 1 N.C. switch (PNP *) with 0 Vdc to 10 Vdc 3-wire output	4 2 N.O. or 2 N.C. switch (PNP*) with 4 mA to 20 mA 3-wire analog output ** 5 2 N.O. or 2 N.C. switch (PNP*) with 0 Vdc to 10 Vdc 3-wire output **	
<b>PROCESS CONNECTIONS</b>	2 1/4" NPT Male 8 1/2" NPT Male	47 1/4" NPT Male sliding compression fitting 48 1/2" NPT Male sliding compression fitting	
<b>TEMPERATURE RANGES</b>	-4/176 -4 °F to 176 °F (-20 °C to 80 °C)	-4/248 -4 °F to 248 °F (-20 °C to 120 °C) † This range is available with sliding compression fitting ONLY	
<b>ELECTRICAL CONNECTION</b>	2 M12 x 1 (4-pin)	3 M12 x 1 (5-pin) ††	
<b>STEM LENGTHS</b>	010 1" *** 020 2" *** 025 2.5" ***	040 4" 060 6" 090 9"	120 12" 140 14"
<b>STEM DIAMETERS</b>	6 6 mm		

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

- \* NPN available, consult factory
- \*\* Available only with M12 x 1 (5-pin) connector
- \*\*\* Not available with sliding compression fitting
- † Available only with sliding compression fitting process connection and stem lengths ≥4"
- †† Switch function 4 and 5 only

### EXAMPLE

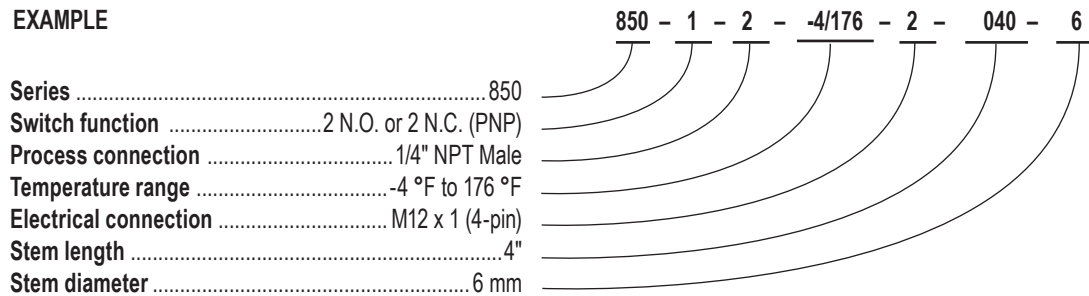

## 850 Series

**Tapered Thread**

F							
in	1	2	2.5	4	6	9	14

**1 switching output (M12 x 1) with 4 mA to 20 mA signal ††**

p-switching

**2 switching output (M12x1) with 4 mA to 20 mA signal ††**

p-switching

**Sliding Compression Fitting with Tapered Thread**

F				
in	4	6	9	14

**2 switching output (M12 x 1) p-switching**

†† Also applies to 0 Vdc to 10 Vdc output

**Dimensions inches (mm) with circular connector M12 x 1 (4-pin and 5-pin)**

Ø1.50" (38 mm)

1.42" (36 mm)

3.23" (82 mm)

1.38" (35 m)

M12 x 1

1.06" (27 mm) HEX

1/2" NPT

Ø.138" (35 mm)

Ø.24" (6 mm)

1.16" (29.5 mm)

Display rotates >300°

Electrical Connection rotates >300°

# Industrial RTD, Probe Type

## 900 SERIES



- General purpose RTD probe with PVC or PTFE lead wires
- Adjustable and welded fittings available
- Ideal for OEM applications
- PVC or PTFE jacketed lead wires are available
- A variety of fitting sizes and probe diameters are available
- RTD PT100  $\Omega$  standard, others available
- 2, 3 or 4-wire circuit types
- Isolation to 500 Vdc
- Custom designs available

### APPLICATIONS

- Chemical processing
- Textile production
- Automotive
- Plastics processing
- HVAC

### SPECIFICATIONS

<b>Temperature ranges</b>	-50 °F to 400 °F (-50 °C to 200 °C) -50 °F to 750 °F (-50 °C to 400 °C) -330 °F to 1,100 °F (-200 °C to 600 °C)
<b>Sheath material</b>	316 Stainless Steel
<b>Finish (standard)</b>	32 micro-inches maximum
<b>Pressure rating</b>	500 psi (34.5 bar), tube only
<b>RTD element</b>	PT100 $\Omega$ @ 32 °F (0 °C), $\alpha=0.00385$ IEC 751
<b>Lead wires</b>	Stranded 22 AWG standard, PVC or PTFE insulation
<b>Self-heating</b>	50 mW / °C typical in moving water
<b>Insulation resistance</b>	Single element probes: 100 mega $\Omega$ /min. at 500 Vdc, leads to case Dual element probes: 100 mega $\Omega$ /min. at 100 Vdc, between element and leads to case
<b>Transition</b>	Sheath to wire transition max. temperature 266 °F (130 °C)



**WARNING:** This product can expose you to chemicals including Chromium (VI) and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Thermowells are recommended for pressure, corrosive fluids and high velocity applications, see pages 48-50.

ORDERING INFORMATION			
<b>SERIES</b>	<b>900</b>		
<b>TEMPERATURE RANGES</b>	<b>-50/400</b> -50 °F to 400 °F	<b>-330/1100</b> -330 °F to 1,100 °F	
	<b>-50/750</b> -50 °F to 750 °F		
<b>ACCURACIES</b>	<b>1</b> ±0.12% (±0.3 °C) at 0 °C, Class B	<b>3</b> ±0.04% (±0.1 °C) at 0 °C, Class AA	
	<b>2</b> ±0.06% (±0.15 °C) at 0 °C, Class A		
<b>ELEMENT TYPES</b>	<b>C</b> PT100 Ω at 0 °C	<b>M</b> PT1000 Ω at 0 °C	
<b>CIRCUIT TYPES</b>	<b>1</b> Single, 2-wire	<b>3</b> Single, 4-wire	<b>5</b> Dual, 3-wire
	<b>2</b> Single, 3-wire	<b>4</b> Dual, 2-wire	<b>6</b> Dual, 4-wire
<b>PROCESS CONNECTIONS</b>	<b>0</b> None	<b>8</b> 1/2" NPT Male	
	<b>1</b> 1/8" NPT Male	<b>48</b> 1/2" NPT Male w/sliding compression fitting **	
	<b>2</b> 1/4" NPT Male	<b>61</b> Spring loaded 1/2" NPT **,***	
<b>ELECTRICAL CONNECTIONS</b>	<b>6</b> 1/2" NPT conduit with 36" cable	<b>48</b> M12 x 1 (5-pin) *	
	<b>36</b> Integral cable 36"	<b>49</b> 3-pin RTD plug	
	<b>37</b> 1/2" NPT conduit with 6" flying leads	<b>50</b> M12 x 1 (8-pin)	
<b>STEM LENGTHS</b>	<b>025</b> 2.5"	<b>090</b> 9"	<b>180</b> 18"
	<b>040</b> 4"	<b>120</b> 12"	<b>240</b> 24"
	<b>060</b> 6"	<b>150</b> 15"	
<b>STEM DIAMETERS</b>	<b>1</b> 1/8"	<b>3</b> 3/8"	<b>6</b> 6 mm
	<b>2</b> 1/4"	<b>4</b> 1/2"	


Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

\* Single circuit types only

\*\* Add 2" to stem length for this option. If installing with thermowells, Process Connection option 48 or 61 must be selected.

\*\*\* Only available with Electrical Connection options 6 & 37

### EXAMPLE

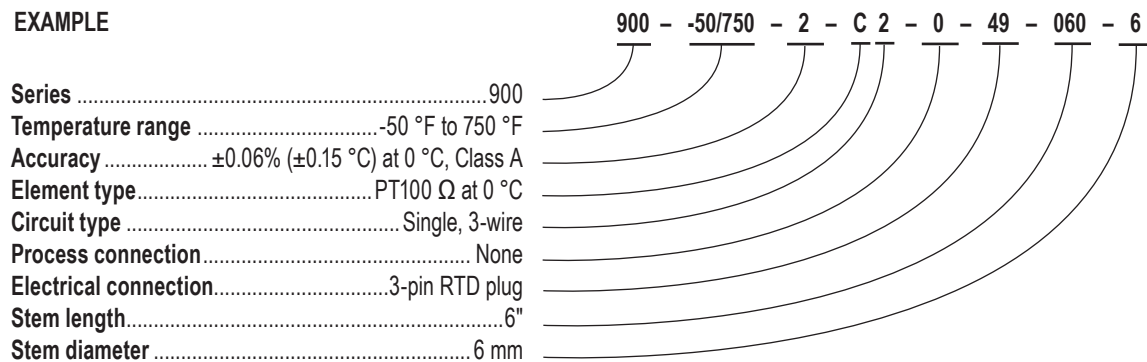


1/2" Conduit With Cable

M12 x 1 (5-pin)

Integral Cable 36"

1/2" NPT w/Flying Leads

RTD Plug

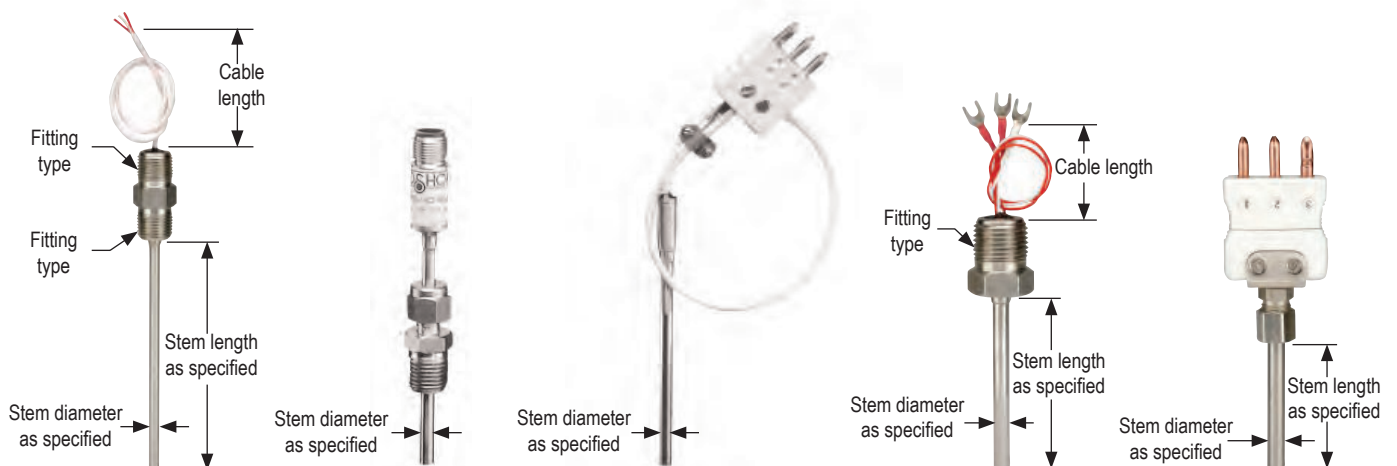

# Industrial RTD, Probe Type with Connection Head



## 910/915 SERIES

- Standard head-type RTD assembly
- A variety of head types are available
- Factory Mutual and Canadian Standards approved explosion proof models available
- Transmitter available, fits standard heads
- Probe welded to fitting or spring loaded
- If used in conjunction with a thermowell, probe can be replaced in some models without possibility for leakage
- Process fitting 1/2" NPT standard, others available
- RTD PT100  $\Omega$  standard, others available
- 2, 3 or 4-wire circuit types
- Isolation to 500 Vdc

### APPLICATIONS

- Industrial boilers
- Petrochemical
- Exhaust gas monitoring
- Food processing

### SPECIFICATIONS

<b>Temperature ranges</b>	-50 °F to 400 °F (-50 °C to 200 °C) -50 °F to 750 °F (-50 °C to 400 °C) -330 °F to 1,100 °F (-200 °C to 600 °C)
<b>Sheath material</b>	316 Stainless Steel
<b>Finish (standard)</b>	32 micro-inches maximum
<b>Pressure rating</b>	500 psi (34.5 bar), tube only
<b>RTD element</b>	PT100 $\Omega$ @ 32 °F (0 °C), $\alpha=0.00385$ IEC 751
<b>Lead wires</b>	Stranded 22 AWG standard, PVC or PTFE insulation
<b>Self-heating</b>	50 mW / °C typical in moving water
<b>Insulation resistance</b>	Single element probes: 100 mega $\Omega$ /min. at 500 Vdc, leads to case Dual element probes: 100 mega $\Omega$ /min. at 100 Vdc, between element and leads to case
<b>Environmental protection</b>	A1/A2: NEMA 4 P1 & S1/S2: NEMA 4X
<b>Transition</b>	Sheath to wire transition max. temperature 266 °F (130 °C)



**WARNING:** This product can expose you to chemicals including Chromium (VI) and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Thermowells are recommended for pressure, corrosive fluids and high velocity applications, see pages 48-50.



# 910/915 SERIES

ORDERING  
INFORMATION  
DIMENSIONS

ORDERING INFORMATION			
<b>SERIES</b>	<b>910</b> Fixed RTD	<b>915</b> Spring-loaded RTD	
<b>TEMPERATURE RANGES</b>	<b>-50/400</b> -50 °F to 400 °F <b>-50/750</b> -50 °F to 750 °F	<b>-330/1100</b> -330 °F to 1,100 °F	
<b>ACCURACIES</b>	<b>1</b> ±0.12% (±0.3 °C) at 0 °C, Class B <b>2</b> ±0.06% (±0.15 °C) at 0 °C, Class A	<b>3</b> ±0.04% (±0.1 °C) at 0 °C, Class AA	
<b>ELEMENT TYPES</b>	<b>C</b> PT100 Ω at 0 °C	<b>M</b> PT1000 Ω at 0 °C	
<b>CIRCUIT TYPES</b>	<b>1</b> Single, 2-wire <b>2</b> Single, 3-wire	<b>3</b> Single, 4-wire <b>4</b> Dual, 2-wire	<b>5</b> Dual, 3-wire <b>6</b> Dual, 4-wire
<b>OPTIONAL TRANSMITTER/ OUTPUT</b>	<b>1U</b> 4 mA to 20 mA, 2-wire, upscale burnout <b>1D</b> 4 mA to 20 mA, 2-wire, downscale burnout <b>2</b> 0 Vdc to 5 Vdc, 3-wire	<b>3</b> 1 Vdc to 5 Vdc, 3-wire <b>5</b> 0 Vdc to 10 Vdc, 3-wire	
<b>PROCESS CONNECTIONS</b>	<b>0</b> None <b>1</b> 1/8" NPT Male <b>2</b> 1/4" NPT Male	<b>8</b> 1/2" NPT Male <b>48</b> 1/2" NPT Male w/sliding compression fitting **	
<b>ELECTRICAL CONNECTIONS</b>	<b>23</b> Connection head w/ 1/2" NPT conduit	<b>45</b> Connection head with 3/4" NPT conduit	
<b>ELECTRICAL CONNECTION MATERIALS</b>	<b>A1</b> Aluminum cast <b>A2</b> Aluminum cast, explosion proof*	<b>P1</b> PP, white <b>S1</b> Stainless Steel cast	<b>S2</b> Stainless Steel cast, explosion proof*
<b>STEM LENGTHS</b>	<b>025</b> 2.5" <b>040</b> 4" <b>060</b> 6"	<b>090</b> 9" <b>120</b> 12" <b>150</b> 15"	<b>180</b> 18" <b>240</b> 24"
<b>STEM DIAMETERS</b>	<b>1</b> 1/8" <b>2</b> 1/4"	<b>3</b> 3/8" <b>4</b> 1/2"	<b>6</b> 6 mm

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.


\* Factory Mutual and Canadian Standards approved explosion proof Class I, Division I, Groups B, C and D; Class II, Division I, Groups E, F and G

\*\* Add 2" to stem length for this option. If installing with thermowells, Process Connection option 48 must be selected.

## EXAMPLE

Series ..... 910  
 Temperature range ..... -330 °F to 1,100 °F  
 Accuracy ..... ±0.12% (±0.3 °C) at 0 °C, Class B  
 Element type ..... PT1000 Ω at 0 °C  
 Circuit type ..... Dual, 2-wire  
 Process connection ..... 1/2" NPT Male  
 Electrical connection ..... Connection head w/1/2" NPT conduit  
 Electrical connection material ..... Stainless Steel cast  
 Stem length ..... 12"  
 Stem diameter ..... 3/8"

910 - -330/1100 - 1 - M 4 - 8 - 23 S1 - 120 - 3

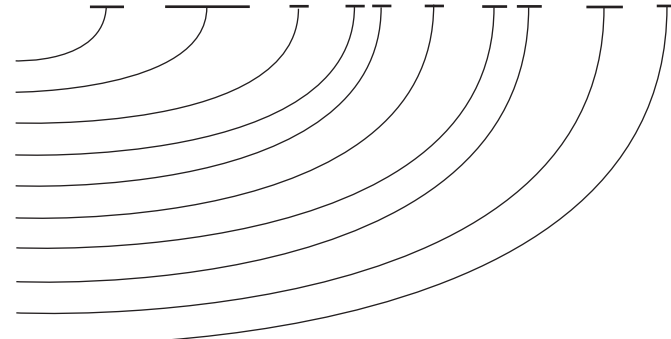

### Aluminum Cast (A1/A2)





### Polypropylene (P1)

### Stainless Steel Cast (S1/S2)


#### NEMA 4

#### NEMA 4X

#### NEMA 4X

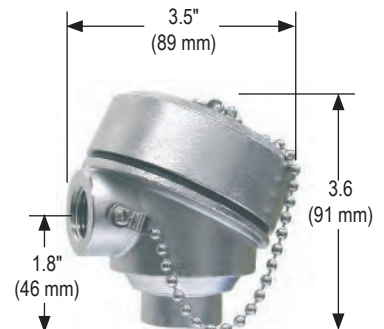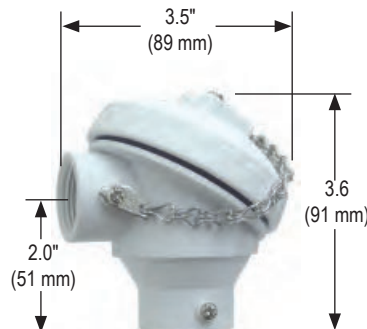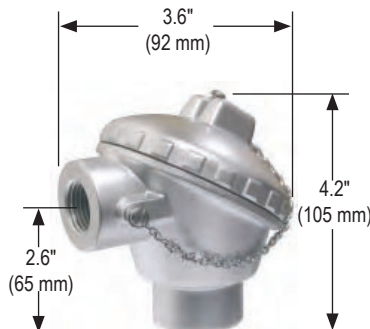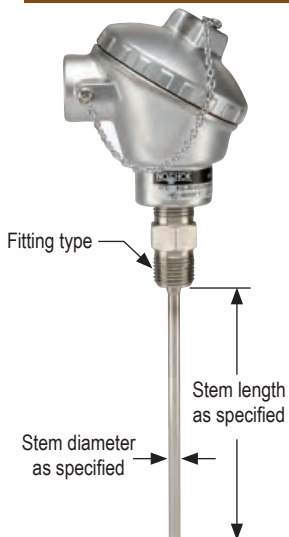

# RTD Transmitter

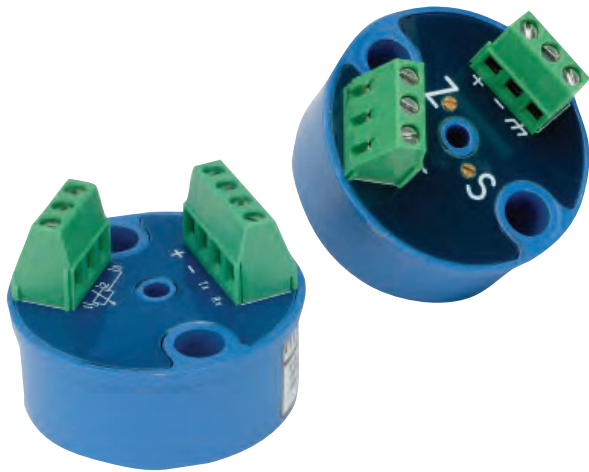

## 920 SERIES

### RTD TRANSMITTERS

- High accuracy ( $\pm 0.1\%$ )
- 2-wire loop-powered 4 mA to 20 mA output
- Linearized output to temperature
- Input RTD PT100 with 3-wire compensation
- Analog design, potentiometer adjustable
- Factory calibrated for fixed range
- Metal housing
- Fits standard heads
- Optional model is fully field re-programmable with module and PC-based software

### ORDERING INFORMATION


<b>SERIES</b>	<b>920</b>		
<b>TYPE</b>	<b>NRT</b> Head-mounted		
<b>INPUT</b>	<b>2</b> PT-100, 3-wire		
<b>OUTPUTS</b>	<b>1</b> 4 mA to 20 mA, 2-wire	<b>2</b> 0 Vdc to 5 Vdc, 3-wire	<b>5</b> 0 Vdc to 10 Vdc, 3-wire
<b>CALIBRATED TEMPERATURE RANGE</b>	Please specify low/high		
<b>UNITS OF MEASURE</b>	<b>C</b> Celsius	<b>F</b> Fahrenheit	
<b>OPTIONS</b>	<b>0</b> None	<b>PC*</b> Computer Programmable	

Special configurations available on request, please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

\*Requires program module and software, 4 mA to 20 mA only

@Vnom = 24 Vdc, T.ambient = 25 °C, Span nom. = 100 °C


### EXAMPLE

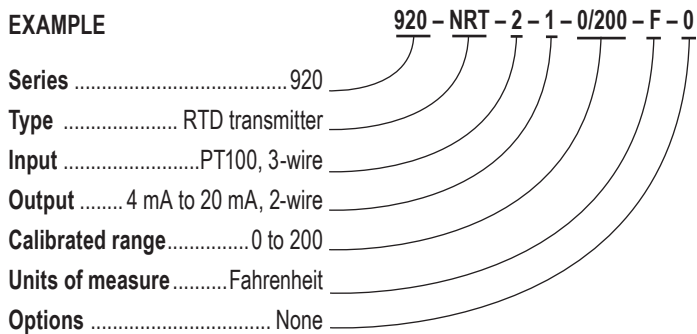

### SPECIFICATIONS

<b>Housing material</b>	Die-cast zinc, enamel painted
<b>Housing dimensions</b>	1.82" dia. x 1.15" H
<b>Input</b>	PT100, 3-wire, $\alpha=0.00385$ , DIN EN 60751
<b>Output</b>	4 mA to 20 mA loop powered or voltage, linear to temperature
<b>Power requirement</b>	12-32 Vdc, polarity protected
<b>Supply effect</b>	0.02%/V, 0.001%/V with computer programmable version
<b>Zero drift</b>	$\pm 0.01\%$ FS/ °C
<b>Span drift</b>	$\pm 0.01\%$ FS/ °C
<b>Long term drift</b>	$\leq 0.5\%$ FS/year
<b>Excitation current RTD</b>	0.8 mA
<b>Sensor lead resistance RTD</b>	500 $\Omega$ max.
<b>Accuracy<sup>1</sup></b>	0.1% FS (includes effects of linearity, hysteresis and repeatability)
<b>Span/zero adjustment</b>	20 turn potentiometer, $\pm 10\%$ for zero and span
<b>Maximum loop resistance</b>	$R_{max} = [(V_{supply} - 9 \text{ Vdc}) / 20 \text{ mA}]$
<b>Open circuit detection</b>	Overscale limit (27.0 mA) or underscale limit (2.2 mA)
<b>Warm up</b>	30 seconds
<b>Temperature ranges</b>	Ambient -40 °F to 176 °F (-40 °C to 80 °C) Storage -40 °F to 176 °F (-40 °C to 80 °C)

<sup>1</sup> Max. error on complete span. Error at calibration point  $\leq 0.1$  °C.

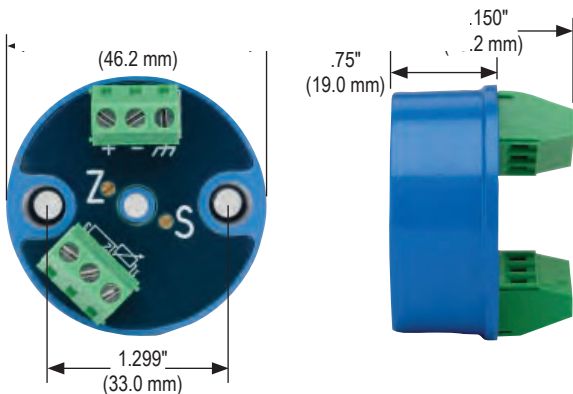

# RTD Accessories

## RTD CONNECTION HEADS

- Screw cover
- Meet NEMA requirements for indoor or outdoor use providing protection against dust, rain, splashing and hose-directed water
- Easy access, one-turn caps
- Accept standard and DIN terminal blocks and transmitters
- Provide greater volume for ease of field wiring




ORDERING INFORMATION			
<b>SERIES</b>	900		
<b>TYPE</b>	RCH RTD connection head		
<b>MATERIALS</b>	A1 Aluminum, general service	P1 PP (white), general service	S2 Stainless Steel, explosion proof *
	A2 Aluminum, explosion proof*	S1 Stainless Steel, general service	
<b>INSTRUMENT CONNECTION</b>	04 1/2" NPT Female		
<b>ELECTRICAL CONNECTIONS</b>	04 1/2" NPT Female conduit	06 3/4" NPT Female conduit	

Special configurations available on request, please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

\* Explosion proof Class I, Division I, Groups B, C and D; Class II, Division I, Groups E, F and H

### EXAMPLE

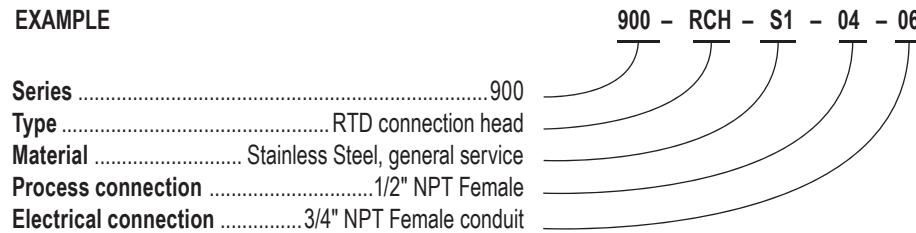

**WARNING:** This product can expose you to chemicals including Chromium (VI) and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## RTD TERMINAL BLOCKS


- Provided with a steatite ceramic base, Brass terminal pieces, and Stainless Steel screws
- Not rated for high voltage use
- Can be used in temperature sensor or low voltage Class 2 circuits



ORDERING INFORMATION			
<b>SERIES</b>	900		
<b>TYPE</b>	RTB RTD terminal block		
<b>MATERIALS</b>	B Bakelite	C Ceramic	
<b>CONFIGURATIONS</b>	2 2 position	4 4 position	
	3 3 position	6 6 position	

Special configurations available on request, please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

### EXAMPLE

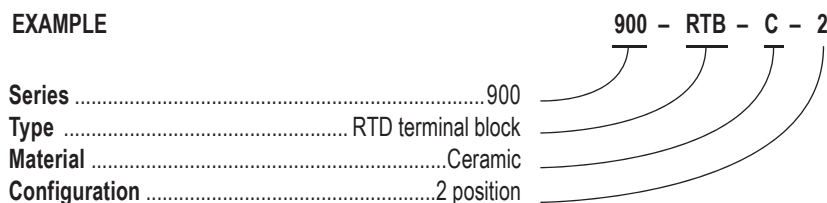

**WARNING:** This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



**WARNING:** This product can expose you to chemicals including Chromium (VI) and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## 50/75/100 SERIES



- Allows a temperature instrument to be removed and replaced without shutting down and draining the process
- Reduces the possibility of damage to the temperature instrument
- Provides protection to the operator
- 1/2" NPSM instrument connection, 3/4" NPT process connection standard - 1/2" NPT, 1" NPT, flanged and sanitary options available
- 150 Class and 300 Class raised face flanged thermowells available
- The Female thread will accept the 1/2" NPT Male thread without galling or seizing
- Brass, 304 Stainless Steel, or 316 Stainless Steel standard material options - other options available
- Standard style is stepped; available in straight and tapered
- Different lagging lengths are available

### APPLICATIONS

- Recommended wherever the process being measured is under pressure, corrosive, abrasive, or moving at a high velocity
- HVAC
- Petrochemical
- Oil and gas
- Process (flanged thermowells)

### SPECIFICATIONS

<b>Bore size</b>	0.260" (6.35 mm)
<b>Process connection</b>	1/2" NPT, 3/4" NPT, 1" NPT
<b>Instrument connection</b>	1/2" NPSM
<b>Materials</b>	316 Stainless Steel, 304 Stainless Steel, Brass
<b>Pressure rating</b>	316 and 316 Stainless Steel: 7,000 psi @ 70 °F Brass: 5,000 psi @ 70 °F
<b>Style</b>	≤4": Straight shank >4": Stepped shank
<b>Maximum shank diameter</b>	0.750" (19.05 mm)



**WARNING:** This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



**WARNING:** This product can expose you to chemicals including Chromium (VI) and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)


ORDERING INFORMATION						
PROCESS CONNECTIONS	50	1/2" NPT only	100	1" NPT or Flange Connection *	200	2" Flange Connection *
	75	3/4" NPT only	150	1-1/2" Flange Connection *		
STEM LENGTHS	025	2-1/2" **	120	12"	25mm	25 mm      250mm 250 mm
	040	4" **	150	15"	50mm	50 mm      350mm 350 mm
	060	6"	180	18"	100mm	100 mm
	090	9"	240	24"	150mm	150 mm
MATERIALS	Brass	Brass	304SS	304 Stainless Steel	316SS	316 Stainless Steel
Other materials available on request						
OPTIONS	1/4	1/4" NPT Instrument Connection	PC	Plug and Chain	RF2	Raised Face 300 Class Flange
	3/8B	3/8" Diameter Bore	RF1	Raised Face 150 Class Flange	RTD	For use with 900/910 Series RTDs

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.


\* To order a Flange Connection, you must specify Option RF1 or RF2. Flange Connections available only in Stainless Steel.

\*\* Flange Connection not available.

**EXAMPLE**

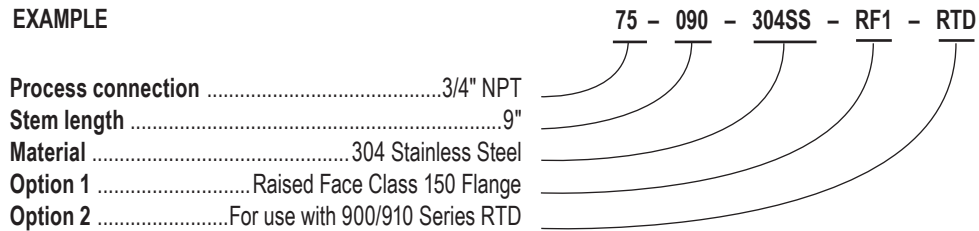


## Straight Shank

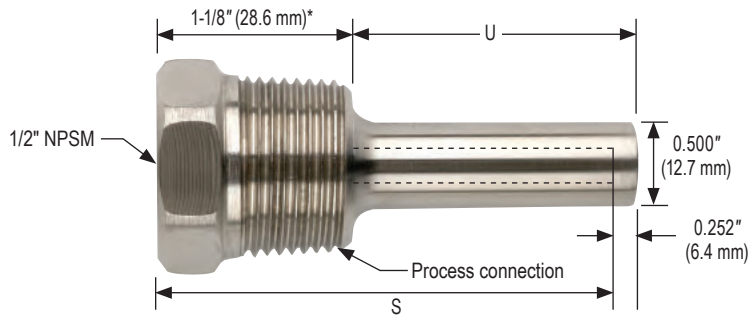

\*1-3/4" (44.5 mm) for 040 Ordering Code

## Stepped Shank

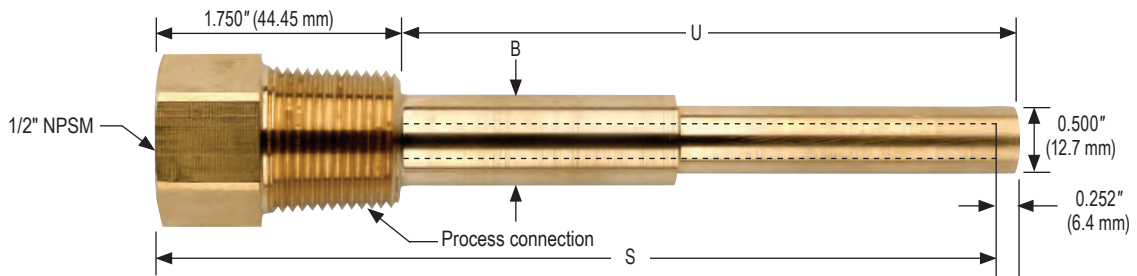


Bore Size	"B" Maximum Insertion Diameter
0.260" (6.35 mm)	3/4" (19.05 mm)

		Straight				Stepped				
Insertion "U"	mm	41.3	63.5	114.3	190.5	266.7	342.9	419.1	571.5	
	inch	1-5/8	2-1/2	4-1/2	7-1/2	10-1/2	13-1/2	16-1/2	22-1/2	
Bore Depth "S"	mm	63.5	101.6	152.4	228.6	304.8	381.0	457.2	609.6	
	inch	2-1/2	4	6	9	12	15	18	24	
Ordering Code		025	040	060	090	120	150	180	240	

Flange Connection Thermowell dimensions on next page.

## RF1 150 Class & RF2 300 Class Raised Face Flanges

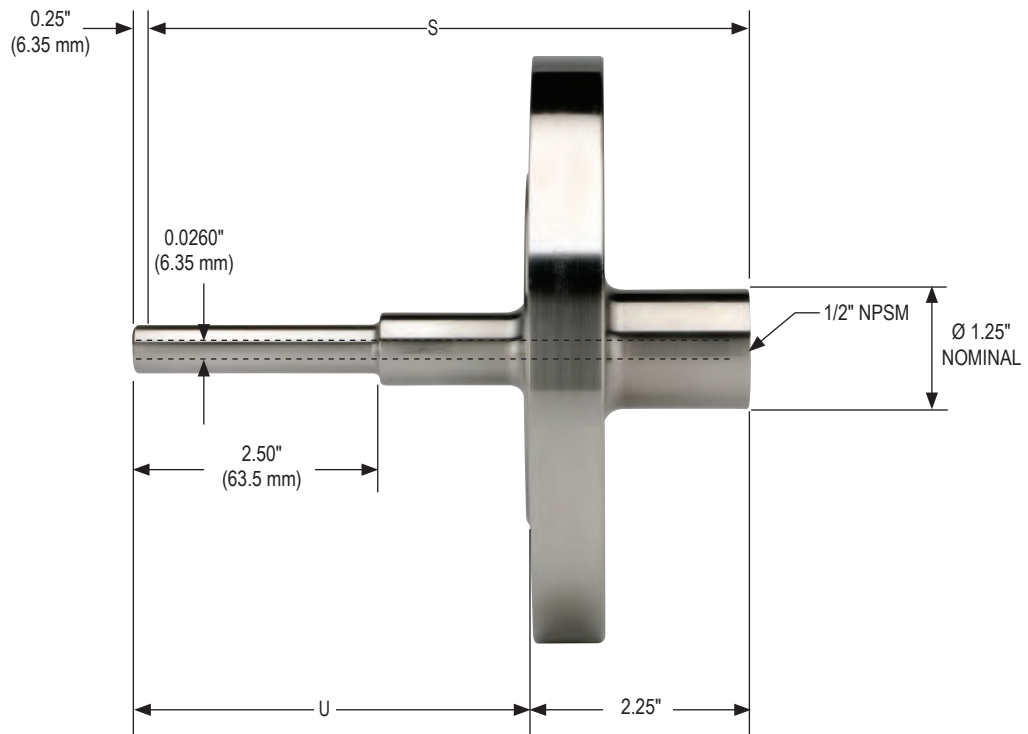

RF1 Class 150 Flange / RF2 Class 300 Flange							
<b>Insertion "U"</b>	mm	101.6	177.8	254.0	330.2	406.4	558.8
	inch	4	7	10	13	16	22
<b>Bore Depth "S"</b>	mm	152.4	228.6	304.8	381.0	457.2	609.6
	inch	6	9	12	15	18	24
<b>Ordering Code</b>		<b>060</b>	<b>090</b>	<b>120</b>	<b>150</b>	<b>180</b>	<b>240</b>

**Note:** NOSHOK Thermowells are provided with NPSM internal thread connections. This female connection may be used with NPT or NPSM mating threads. The NPSM thread provides a better mechanical connection without seizing or galling.

## Standard Temperature Ranges / Figure Intervals

°F Ranges	Figure Interval	Div.	°C Ranges	Figure Interval	Div.
-100° to 150 °F	20°	2°	-70° to 70 °C	10°	1°
-80° to 120 °F	20°	2°	-60° to 50 °C	10°	1°
-40° to 120 °F	20°	2°	-40° to 50 °C	10°	1°
-20° to 120 °F	20°	2°	-30° to 50 °C	10°	1°
-40° to 160 °F	20°	2°	-40° to 70 °C	10°	1°
0° to 100 °F	10°	1°	-20° to 40 °C	5°	1/2°
25° to 125 °F	10°	1°	-5° to 50 °C	5°	1/2°
30° to 130 °F	10°	1°	0° to 55 °C	5°	1/2°
0° to 140 °F	10°	1°	-20° to 60 °C	5°	1/2°
0° to 200 °F	20°	2°	-15° to 90 °C	10°	1°
0° to 250 °F	20°	2°	-20° to 120 °C	10°	1°
20° to 240 °F	20°	2°	-5° to 115 °C	10°	1°
50° to 300 °F	20°	2°	10° to 150 °C	10°	1°
50° to 400 °F	50°	5°	10° to 200 °C	20°	2°
50° to 500 °F	50°	5°	10° to 260 °C	20°	2°
50° to 550 °F	50°	5°	10° to 290 °C	20°	2°
0° to 600 °F	100°	10°	-20° to 315 °C	50°	5°
150° to 750 °F	100°	10°	65° to 400 °C	50°	5°
100° to 800 °F	100°	10°	40° to 425 °C	50°	5°
200° to 1,000 °F	100°	10°	100° to 540 °C	50°	5°

## Thermowells: Pressure Rating vs. Temperature

Thermowell Material	Temperature in Degrees Fahrenheit						
	70 °F	200 °F	400 °F	600 °F	800 °F	1,000 °F	1,200 °F
	Pressure Rating (Pounds Per Square Inch)						
Brass	5,000	4,200	1,000	-	-	-	-
Welded Stainless Steel	982	820	675	604	550	510	299
304 Stainless Steel	7,000	6,200	5,600	5,400	5,200	4,500	1,650
316 Stainless Steel	7,000	7,000	6,400	6,200	6,100	5,100	2,500

## Thermowells: Maximum Fluid Velocity vs. Insertion Length

Thermowell Material	Fluid Type	Insertion Length (Inches)		
		2"	4"	8"
		Maximum Fluid Velocity (Feet per Second)		
Brass	Air/Steam	207	75.5	27.3
	Water	59.3	32.2	19.7
Welded Stainless Steel	Air/Steam	169	61	20
	Water	88	20	10
304 Stainless Steel	Air/Steam	300	109	39.5
316 Stainless Steel	Water	148	82.2	-

**Note:** The values shown in this table are based on operating temperatures of 350 °F for Brass and 1,000 °F for Stainless Steel. Slightly higher velocities are possible at lower temperatures.



**RTD Temperature vs. Resistance Table (Alpha +0.00385)**

°C	°F	Ohms	°C	°F	Ohms	°C	°F	Ohms	°C	°F	Ohms	°C	°F	Ohms
-75	-103	101.95	-27	-16.6	89.4	21	69.8	108.18	69	156.2	126.7	117	242.6	144.94
-74	-101.2	70.73	-26	-14.8	89.8	22	71.6	108.57	70	158	127.08	118	244.4	145.32
-73	-99.4	71.13	-25	-13	90.19	23	73.4	108.96	71	159.8	127.46	119	246.2	145.69
-72	-97.6	71.53	-24	-11.2	90.59	24	75.2	109.35	72	161.6	127.85	120	248	146.07
-71	-95.8	71.93	-23	-9.4	90.98	25	77	109.73	73	163.4	128.23	121	249.8	146.45
-70	-94	72.33	-22	-7.6	91.37	26	78.8	110.12	74	165.2	128.61	122	251.6	146.82
-69	-92.2	72.73	-21	-5.8	91.77	27	80.6	110.51	75	167	128.99	123	253.4	147.2
-68	-90.4	73.13	-20	-4	92.16	28	82.4	110.9	76	168.8	129.38	124	255.2	147.58
-67	-88.6	73.53	-19	-2.2	92.55	29	84.2	111.28	77	170.6	129.76	125	257	147.95
-66	-86.8	73.93	-18	-0.4	92.95	30	86	111.67	78	172.4	130.14	126	258.8	148.33
-65	-85	74.33	-17	1.4	93.34	31	87.8	112.06	79	174.2	130.52	127	260.6	148.71
-64	-83.2	74.73	-16	3.2	93.73	32	89.6	112.45	80	176	130.9	128	262.4	149.08
-63	-81.4	75.13	-15	5	94.12	33	91.4	112.83	81	177.8	131.28	129	264.2	149.46
-62	-79.6	75.53	-14	6.8	94.52	34	93.2	113.22	82	179.6	131.67	130	266	149.83
-61	-77.8	75.93	-13	8.6	94.91	35	95	113.61	83	181.4	132.05	131	267.8	150.21
-60	-76	76.33	-12	10.4	95.3	36	96.8	113.99	84	183.2	132.43	132	269.6	150.58
-59	-74.2	76.73	-11	12.2	95.69	37	98.6	114.38	85	185	132.81	133	271.4	150.96
-58	-72.4	77.13	-10	14	96.09	38	100.4	114.77	86	186.8	133.19	134	273.2	151.34
-57	-70.6	77.52	-9	15.8	96.48	39	102.2	115.15	87	188.6	133.57	135	275	151.71
-56	-68.8	77.92	-8	17.6	96.87	40	104	115.54	88	190.4	133.95	136	276.8	152.09
-55	-67	78.32	-7	19.4	97.26	41	105.8	115.93	89	192.2	134.33	137	278.6	152.46
-54	-65.2	78.72	-6	21.2	97.65	42	107.6	116.31	90	194	134.71	138	280.4	152.84
-53	-63.4	79.11	-5	23	98.04	43	109.4	116.7	91	195.8	135.09	139	282.2	153.21
-52	-61.6	79.51	-4	24.8	98.44	44	111.2	117.08	92	197.6	135.47	140	284	153.58
-51	-59.8	79.91	-3	26.6	98.83	45	113	117.47	93	199.4	135.85	141	285.8	153.95
-50	-58	80.31	-2	28.4	99.22	46	114.8	117.85	94	201.2	136.23	142	287.6	154.32
-49	-56.2	80.7	-1	30.2	99.61	47	116.6	118.24	95	203	136.61	143	289.4	154.71
-48	-54.4	81.1	0	32	100	48	118.4	118.62	96	204.8	136.99	144	291.2	155.08
-47	-52.6	81.5	1	33.8	100.39	49	120.2	119.01	97	206.6	137.37	145	293	155.46
-46	-50.8	81.89	2	35.6	100.78	50	122	119.4	98	208.4	137.75	146	294.8	155.83
-45	-49	82.29	3	37.4	101.17	51	123.8	119.78	99	210.2	138.13	147	296.6	156.21
-44	-47.2	82.69	4	39.2	101.56	52	125.6	120.16	100	212	138.51	148	298.4	156.58
-43	-45.4	83.08	5	41	101.95	53	127.4	120.55	101	213.8	138.89	149	300.2	156.96
-42	-43.6	83.48	6	42.8	102.34	54	129.2	120.93	102	215.6	139.27	150	302	157.33
-41	-41.8	83.88	7	44.6	102.73	55	131	121.32	103	217.4	139.65	151	303.8	157.71
-40	-40	84.27	8	46.4	103.12	56	132.8	121.7	104	219.2	140.03	152	305.6	158.08
-39	-38.2	84.67	9	48.2	103.51	57	134.6	122.09	105	221	140.39	153	307.4	158.45
-38	-36.4	85.06	10	50	103.9	58	136.4	122.47	106	222.8	140.77	154	309.2	158.83
-37	-34.6	85.46	11	51.8	104.29	59	138.2	122.86	107	224.6	141.15	155	311	159.2
-36	-32.8	85.85	12	53.6	104.68	60	140	123.24	108	226.4	141.53	156	312.8	159.56
-35	-31	86.25	13	55.4	105.07	61	141.8	123.62	109	228.2	141.91	157	314.6	159.94
-34	-29.2	86.64	14	57.2	105.46	62	143.6	124.01	110	230	142.29	158	316.4	160.31
-33	-27.4	87.04	15	59	105.85	63	145.4	124.39	111	231.8	142.66	159	318.2	160.68
-32	-25.6	87.43	16	60.8	106.24	64	147.2	124.77	112	233.6	143.04	160	320	161.05
-31	-23.8	87.83	17	62.6	106.63	65	149	125.17	113	235.4	143.42	161	321.8	161.43
-30	-22	88.22	18	64.4	107.02	66	150.8	125.55	114	237.2	143.8	162	323.6	161.8
-29	-20.2	88.62	19	66.2	107.4	67	152.6	125.93	115	239	144.18	163	325.4	162.17
-28	-18.4	89.01	20	68	107.79	68	154.4	126.32	116	240.8	144.56	164	327.2	162.54

### RTD Temperature vs. Resistance Table (Alpha +0.00385)

°C	°F	Ohms	°C	°F	Ohms	°C	°F	Ohms	°C	°F	Ohms	°C	°F	Ohms
165	329	162.91	213	415.4	180.63	261	501.8	198.07	309	588.2	215.26	357	674.6	232.16
166	330.8	163.28	214	417.2	180.99	262	503.6	198.43	310	590	215.61	358	676.4	232.51
167	332.6	163.66	215	419	181.36	263	505.4	198.79	311	591.8	215.97	359	678.2	232.86
168	334.4	164.03	216	420.8	181.73	264	507.2	199.15	312	593.6	216.32	360	680	233.21
169	336.2	164.4	217	422.6	182.09	265	509	199.51	313	595.4	216.68	361	681.8	233.56
170	338	164.77	218	424.4	182.46	266	510.8	199.87	314	597.2	217.03	362	683.6	233.91
171	339.8	165.14	219	426.2	182.82	267	512.6	200.23	315	599	217.39	363	685.4	234.26
172	341.6	165.51	220	428	183.19	268	514.4	200.59	316	600.8	217.73	364	687.2	234.6
173	343.4	165.88	221	429.8	183.55	269	516.2	200.95	317	602.6	218.08	365	689	234.95
174	345.2	166.25	222	431.6	183.92	270	518	201.31	318	604.4	218.44	366	690.8	235.3
175	347	166.62	223	433.4	184.28	271	519.8	201.67	319	606.2	218.79	367	692.6	235.65
176	348.8	167	224	435.2	184.65	272	521.6	202.03	320	608	219.15	368	694.4	236
177	350.6	167.37	225	437	185.01	273	523.4	202.38	321	609.8	219.5	369	696.2	236.35
178	352.4	167.74	226	438.8	185.38	274	525.2	202.74	322	611.6	219.85	370	698	236.7
179	354.2	168.11	227	440.6	185.74	275	527	203.1	323	613.4	220.21	371	699.8	237.05
180	356	168.48	228	442.4	186.11	276	528.8	203.46	324	615.2	220.56	372	701.6	237.4
181	357.8	168.85	229	444.2	186.47	277	530.6	203.82	325	617	220.91	373	703.4	237.75
182	359.6	169.22	230	446	186.84	278	532.4	204.18	326	618.8	221.27	374	705.2	238.09
183	361.4	169.59	231	447.8	187.2	279	534.2	204.54	327	620.6	221.62	375	707	238.44
184	363.2	169.96	232	449.6	187.56	280	536	204.9	328	622.4	221.97	376	708.8	238.79
185	365	170.33	233	451.4	187.93	281	537.8	205.25	329	624.2	222.32	377	710.6	239.14
186	366.8	170.69	234	453.2	188.29	282	539.6	205.61	330	626	222.68	378	712.4	239.48
187	368.6	171.06	235	455	188.65	283	541.4	205.97	331	627.8	223.03	379	714.2	239.83
188	370.4	171.43	236	456.8	189.02	284	543.2	206.33	332	629.6	223.38	380	716	240.18
189	372.2	171.8	237	458.6	189.38	285	545	206.7	333	631.4	223.73	381	717.8	240.52
190	374	172.17	238	460.4	189.74	286	546.8	207.05	334	633.2	224.09	382	719.6	240.87
191	375.8	172.54	239	462.2	190.11	287	548.6	207.41	335	635	224.45	383	721.4	241.22
192	377.6	172.91	240	464	190.47	288	550.4	207.77	336	636.8	224.8	384	723.2	241.56
193	379.4	173.27	241	465.8	190.83	289	552.2	208.13	337	638.6	225.15	385	725	241.91
194	381.2	173.64	242	467.6	191.2	290	554	208.48	338	640.4	225.5	386	726.8	242.25
195	383	174.01	243	469.4	191.56	291	555.8	208.84	339	642.2	225.85	387	728.6	242.6
196	384.8	174.39	244	471.2	191.92	292	557.6	209.2	340	644	226.21	388	730.4	242.95
197	386.6	174.75	245	473	192.28	293	559.4	209.55	341	645.8	226.56	389	732.2	243.29
198	388.4	175.12	246	474.8	192.66	294	561.2	209.91	342	647.6	226.91	390	734	243.64
199	390.2	175.49	247	476.6	193.02	295	563	210.27	343	649.4	227.26	391	735.8	243.98
200	392	175.86	248	478.4	193.38	296	564.8	210.62	344	651.2	227.61	392	737.6	244.33
201	393.8	176.23	249	480.2	193.74	297	566.6	210.98	345	653	227.96	393	739.4	244.67
202	395.6	176.59	250	482	194.1	298	568.4	211.34	346	654.8	228.31	394	741.2	245.02
203	397.4	176.96	251	483.8	194.47	299	570.2	211.69	347	656.6	228.66	395	743	245.36
204	399.2	177.33	252	485.6	194.83	300	572	212.05	348	658.4	229.01	396	744.8	245.71
205	401	177.7	253	487.4	195.19	301	573.8	212.4	349	660.2	229.36	397	746.6	246.05
206	402.8	178.06	254	489.2	195.55	302	575.6	212.76	350	662	229.72	398	748.4	246.4
207	404.6	178.43	255	491	195.9	303	577.4	213.12	351	663.8	230.07	399	750.2	246.74
208	406.4	178.8	256	492.8	196.26	304	579.2	213.47	352	665.6	230.42	400	752	247.09
209	408.2	179.16	257	494.6	196.62	305	581	213.83	353	667.4	230.77			
210	410	179.53	258	496.4	196.98	306	582.8	214.19	354	669.2	231.12			
211	411.8	179.9	259	498.2	197.35	307	584.6	214.55	355	671	231.47			
212	413.6	180.26	260	500	197.71	308	586.4	214.9	356	672.8	231.81			

## Temperature Conversions


	From Fahrenheit	To Fahrenheit
<b>Celsius</b>	$[^{\circ}\text{C}] = ([^{\circ}\text{F}] - 32) \times 5/9$	$[^{\circ}\text{F}] = [^{\circ}\text{C}] \times 9/5 + 32$
<b>Kelvin</b>	$[\text{K}] = ([^{\circ}\text{F}] + 459.67) \times 5/9$	$[^{\circ}\text{F}] = [\text{K}] \times 9/5 - 459.67$
<b>Rankine</b>	$[^{\circ}\text{R}] = [^{\circ}\text{F}] + 459.67$	$[^{\circ}\text{F}] = [^{\circ}\text{R}] - 459.67$
<b>Delisle</b>	$[^{\circ}\text{De}] = (212 - [^{\circ}\text{F}]) \times 5/6$	$[^{\circ}\text{F}] = 212 - [^{\circ}\text{De}] \times 6/5$
<b>Newton</b>	$[^{\circ}\text{N}] = ([^{\circ}\text{F}] - 32) \times 11/60$	$[^{\circ}\text{F}] = [^{\circ}\text{N}] \times 60/11 + 32$
<b>Réaumur</b>	$[^{\circ}\text{Ré}] = ([^{\circ}\text{F}] - 32) \times 4/9$	$[^{\circ}\text{F}] = [^{\circ}\text{Ré}] \times 9/4 + 32$
<b>Rømer</b>	$[^{\circ}\text{Rø}] = ([^{\circ}\text{F}] - 32) \times 7/24 + 7.5$	$[^{\circ}\text{F}] = ([^{\circ}\text{Rø}] - 7.5) \times 24/7 + 32$

	From Celsius (Centigrade)	To Celsius (Centigrade)
<b>Fahrenheit</b>	$[^{\circ}\text{F}] = [^{\circ}\text{C}] \times 9/5 + 32$	$[^{\circ}\text{C}] = ([^{\circ}\text{F}] - 32) \times 5/9$
<b>Kelvin</b>	$[\text{K}] = [^{\circ}\text{C}] + 273.15$	$[^{\circ}\text{C}] = [\text{K}] - 273.15$
<b>Rankine</b>	$[^{\circ}\text{R}] = ([^{\circ}\text{C}] + 273.15) \times 9/5$	$[^{\circ}\text{C}] = ([^{\circ}\text{R}] - 491.67) \times 5/9$
<b>Delisle</b>	$[^{\circ}\text{De}] = (100 - [^{\circ}\text{C}]) \times 3/2$	$[^{\circ}\text{C}] = 100 - [^{\circ}\text{De}] \times 2/3$
<b>Newton</b>	$[^{\circ}\text{N}] = [^{\circ}\text{C}] \times 33/100$	$[^{\circ}\text{C}] = [^{\circ}\text{N}] \times 100/33$
<b>Réaumur</b>	$[^{\circ}\text{Ré}] = [^{\circ}\text{C}] \times 4/5$	$[^{\circ}\text{C}] = [^{\circ}\text{Ré}] \times 5/4$
<b>Rømer</b>	$[^{\circ}\text{Rø}] = [^{\circ}\text{C}] \times 21/40 + 7.5$	$[^{\circ}\text{C}] = ([^{\circ}\text{Rø}] - 7.5) \times 40/21$


	From Kelvin	To Kelvin
<b>Celsius</b>	$[^{\circ}\text{C}] = [\text{K}] - 273.15$	$[\text{K}] = [^{\circ}\text{C}] + 273.15$
<b>Fahrenheit</b>	$[^{\circ}\text{F}] = [\text{K}] \times 9/5 - 459.67$	$[\text{K}] = ([^{\circ}\text{F}] + 459.67) \times 5/9$
<b>Rankine</b>	$[^{\circ}\text{R}] = [\text{K}] \times 9/5$	$[\text{K}] = [^{\circ}\text{R}] \times 5/9$
<b>Delisle</b>	$[^{\circ}\text{De}] = (373.15 - [\text{K}]) \times 3/2$	$[\text{K}] = 373.15 - [^{\circ}\text{De}] \times 2/3$
<b>Newton</b>	$[^{\circ}\text{N}] = ([\text{K}] - 273.15) \times 33/100$	$[\text{K}] = [^{\circ}\text{N}] \times 100/33 + 273.15$
<b>Réaumur</b>	$[^{\circ}\text{Ré}] = ([\text{K}] - 273.15) \times 4/5$	$[\text{K}] = [^{\circ}\text{Ré}] \times 5/4 + 273.15$
<b>Rømer</b>	$[^{\circ}\text{Rø}] = ([\text{K}] - 273.15) \times 21/40 + 7.5$	$[\text{K}] = ([^{\circ}\text{Rø}] - 7.5) \times 40/21 + 273.15$

## Wiring Diagrams


**2-Wire**

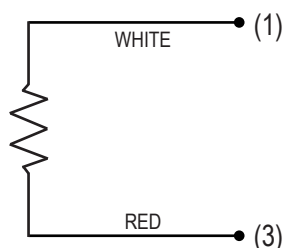


**3-Wire**

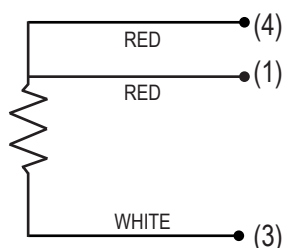


**4-Wire**

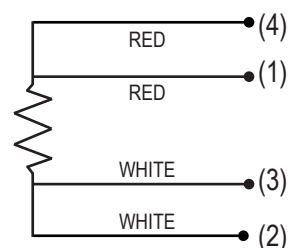


**Dual 2-Wire**

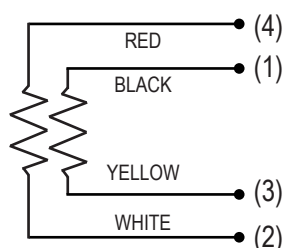

**Dual 3-Wire**

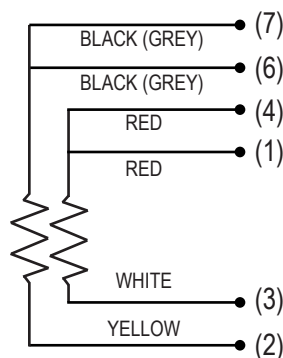

**Dual 4-Wire**

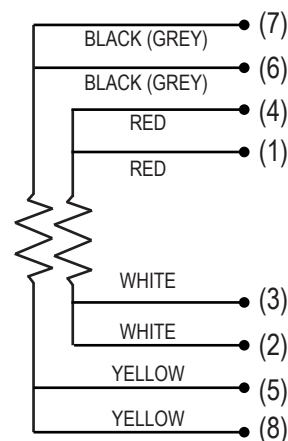

### Thermometer Tolerance Classes per EN 60751

Tolerance Classes	Resistance Tolerance at 0 °C	Tolerance as a Function of Absolute Value of Temperature in °C
Class AA	±0.04% (±0.1 °C)	±[0.1 + (0.0017 *  t )]
Class A	±0.06% (±0.15 °C)	±[0.15 + (0.002 *  t )]
Class B	±0.12% (±0.3 °C)	±[0.3 + (0.005 *  t )]
Class C	±0.23% (±0.6 °C)	±[0.6 + (0.01 *  t )]

### RTD Standards

Organization	Standard	ALPHA: Average Temperature Coefficient of Resistance (0 °C) <sup>-1</sup>	Nominal Resistance at 0 °C
British Standard	BS 1904 : 1984	0.003850	100
Deutsch Industrial Norm	DIN 43760 :1980	0.003850	100
International Electrotechnical Commission	IEC 751 : 1995 (Amend. 2)	0.003850	100
Scientific Apparatus Manufacturers of America	SAMA RC-4-1966	0.003923	98.129
Japanese Standard	JIS C1604-1981	0.003916	100
American Society for Testing & Materials	ASTM E1137	0.003850	100





# NOTES





TO DOWNLOAD OR ORDER CATALOGS,  
VISIT [WWW.NOSHOK.COM](http://WWW.NOSHOK.COM)

# Quality Policy

NOSHOK is committed to providing a high degree of value and continually improving processes to enhance customer satisfaction by focusing on customer requirements for the design, manufacture and distribution of pressure, level, temperature, and force measurement instrumentation, needle, manifold valves, custom manifold systems for industrial applications and compressed air filters.

All from world class technology.

Combined with real-world stamina.

The highest value with the industry's best warranty.

And all from a company with a 50+ year record of customer satisfaction.

All from your Single Source Instrumentation Company.



**Corporate Headquarters**

1010 West Bagley Road  
Berea, Ohio 44017  
Ph: 440.243.0888  
Fax: 440.243.3472  
E-mail: [noshok@noshok.com](mailto:noshok@noshok.com)  
Web: [www.noshok.com](http://www.noshok.com)

